




10/5407333  
PCT/GB 2003/00566  
INVESTOR IN PEOPLE

GB 03/05663




The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales NP10 8QQ  
24 JUN 2005

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

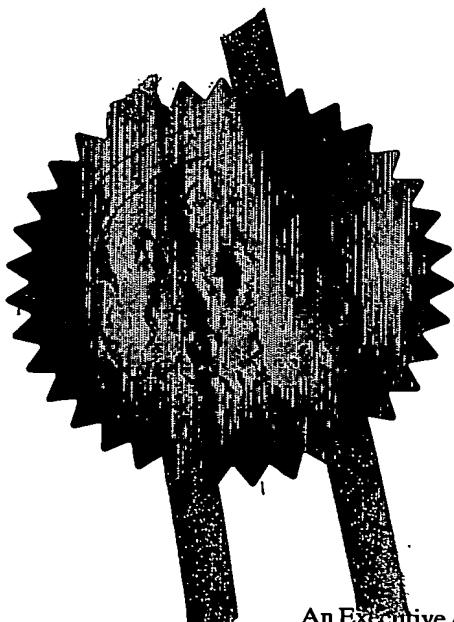

Signed

*[Signature]*


Dated

3 February 2004

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**BEST AVAILABLE COPY**



270 2 E73486-4 012133  
F01/7700 0230077.0

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

534

2. Patent application number

(The Patent Office will fill in this part)

24 DEC 2002

0230077.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ELAM-T LIMITED  
103 BOROUGH ROAD  
LONDON  
SE1 0AA

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

081052 80001

4. Title of the invention

ELECTROLUMINESCENT MATERIALS AND DEVICES

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

COHEN, ALAN NICOL  
2 GROVE PLACE  
TATSFIELD  
Nr. WESTERHAM  
KENT  
TN16 2BB

Patents ADP number (if you know it)

06963554001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for each of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 21

Claim(s) 6

Abstract 1

Drawing(s) 25 + 25 *fl*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

12. Name and daytime telephone number of person to contact in the United Kingdom A. N. Cohen 01959 577172

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

## Electroluminescent Materials and Devices

The present invention relates to electroluminescent materials and to electroluminescent devices.

5

Materials which emit light when an electric current is passed through them are well known and used in a wide range of display applications. Liquid crystal devices and devices which are based on inorganic semiconductor systems are widely used, however these suffer from the disadvantages of high energy consumption, high cost of manufacture, low quantum efficiency and the inability to make flat panel displays.

10

Organic polymers have been proposed as useful in electroluminescent devices, but it is not possible to obtain pure colours, they are expensive to make and have a relatively low efficiency.

15

Another compound which has been proposed is aluminium quinolate, but this requires dopants to be used to obtain a range of colours and has a relatively low efficiency.

20

Patent application WO98/58037 describes a range of transition metal and lanthanide complexes which can be used in electroluminescent devices which have improved properties and give better results. Patent Applications PCT/GB98/01773, PCT/GB99/03619, PCT/GB99/04030, PCT/GB99/04024, PCT/GB99/04028, PCT/GB00/00268 describe electroluminescent complexes, structures and devices using rare earth chelates.

25

US Patent 5128587 discloses an electroluminescent device which consists of an organometallic complex of rare earth elements of the lanthanide series sandwiched between a transparent electrode of high work function and a second electrode of low

work function with a hole conducting layer interposed between the electroluminescent layer and the transparent high work function electrode and an electron conducting layer interposed between the electroluminescent layer and the electron injecting low work function anode. The hole conducting layer and the  
5 electron conducting layer are required to improve the working and the efficiency of the device. The hole transporting layer serves to transport holes and to block the electrons, thus preventing electrons from moving into the electrode without recombining with holes. The recombination of carriers therefore mainly takes place in the emitter layer.

10

It is known that electroluminescent europium organometallic complexes emit light in the red part of the spectrum and application WO98/58037 discloses such complexes.

15

We have now devised an electroluminescent structure which gives improved red emission.

20

According to the invention there is provided an electroluminescent device which comprises (i) a first electrode (ii) a layer of an electroluminescent europium metal complex or organo metallic complex mixed with an iridium metal complex or organo  
20 metallic complex and (iii) a second electrode.

25

There is preferably also a layer of an electroluminescent europium metal complex or organo metallic complex and the invention also provides electroluminescent devices of structures:-

30

(i) a first electrode (ii) a layer of an electroluminescent europium metal complex or organo metallic complex (iii) a layer of an electroluminescent europium metal complex or organo metallic complex mixed with an iridium metal complex or organo  
30 metallic complex and (iv) a second electrode;


(i) a first electrode (ii) a layer of an electroluminescent europium metal complex or organo metallic complex mixed with an iridium metal complex or organo metallic

complex (iii) a layer of an electroluminescent europium metal complex or organo metallic complex and (iv) a second electrode;

5 (i) a first electrode (ii) a layer of an electroluminescent europium metal complex or organo metallic complex (iii) a layer of an electroluminescent europium metal complex or organo metallic complex mixed with an iridium metal complex or organo metallic complex (iv) a layer of an electroluminescent europium metal complex or organo metallic complex and (v) a second electrode.

10 The electroluminescent europium metal complex or organo metallic complex preferably has the formula  $(L\alpha)_3Eu$  where  $L\alpha$  is an organic complex.

15 Preferred electroluminescent compounds which can be used in the present invention are of formula



(A)


20 where  $L\alpha$  and  $Lp$  are organic ligands and  $Lp$  is a neutral ligand. The ligands  $L\alpha$  can be the same or different and there can be a plurality of ligands  $Lp$  which can be the same or different.

25 For example  $(L_1)(L_2)(L_3)Eu (Lp)$  where  $(L_1)(L_2)(L_3)$  are the same or different organic complexes and  $(Lp)$  is a neutral ligand and the different groups  $(L_1)(L_2)(L_3)$  may be the same or different

$Lp$  can be monodentate, bidentate or multidentate and there can be one or more ligands  $Lp$ .

Further electroluminescent compounds which can be used in the present invention are of general formula  $(L\alpha)_nEuM_2$  where  $M_2$  is a non rare earth metal,  $L\alpha$  is as above and  $n$  is the combined valence state of  $Eu$  and  $M_2$ . The complex can also comprise one or more neutral ligands  $Lp$  so the complex has the general formula  $(L\alpha)_n Eu M_2 (Lp)$ , where  $Lp$  is as above. The metal  $M_2$  can be any metal which is not a rare earth, lanthanide or an actinide examples of metals which can be used include lithium, sodium, potassium, rubidium, caesium, beryllium, magnesium, calcium, strontium, barium, boron, copper (I), copper (II), silver, gold, zinc, cadmium, boron, aluminium, gallium, indium, germanium, tin (II), tin (IV), antimony (II), antimony (IV), lead (II), lead (IV) and metals of the first, second and third groups of transition metals in different valence states e.g. manganese, iron, ruthenium, osmium, cobalt, nickel, palladium(II), palladium(IV), platinum(II), platinum(IV), cadmium, chromium, titanium, vanadium, zirconium, hafnium, tantalum, molybdenum, rhodium, iridium, titanium, niobium, scandium, yttrium.

Preferably  $L\alpha$  is selected from  $\beta$  diketones such as those of formulae

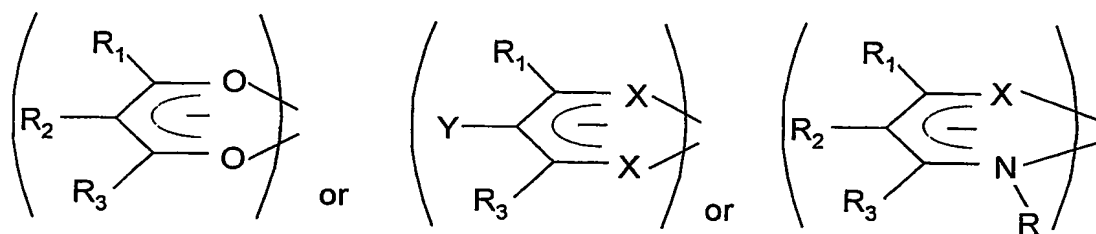


where  $R_1$ ,  $R_2$  and  $R_3$  can be the same or different and are selected from hydrogen, and substituted and unsubstituted hydrocarbyl groups such as substituted and unsubstituted aliphatic groups, substituted and unsubstituted aromatic, heterocyclic and polycyclic ring structures, fluorocarbons such as trifluoromethyl groups, halogens such as fluorine or thiophenyl groups;  $R_1$ ,  $R_2$  and  $R_3$  can also form substituted and unsubstituted fused aromatic, heterocyclic and polycyclic ring

structures and can be copolymerisable with a monomer e.g. styrene. X is Se, S or O, Y can be hydrogen, substituted or unsubstituted hydrocarbyl groups, such as substituted and unsubstituted aromatic, heterocyclic and polycyclic ring structures, fluorine, fluorocarbons such as trifluoromethyl groups, halogens such as fluorine or thiophenyl groups or nitrile.

Examples of  $R_1$  and/or  $R_2$  and/or  $R_3$  include aliphatic, aromatic and heterocyclic alkoxy, aryloxy and carboxy groups, substituted and unsubstituted phenyl, fluorophenyl, biphenyl, phenanthrene, anthracene, naphthyl and fluorene groups alkyl groups such as t-butyl, heterocyclic groups such as carbazole and borazole.

Some of the different groups  $L_\alpha$  may also be the same or different charged groups such as carboxylate groups so that the group  $L_1$  can be as defined above and the groups  $L_2, L_3...$  can be charged groups such as



(IV)

where R is  $R_1$  as defined above or the groups  $L_1, L_2$  can be as defined above and  $L_3...$  etc. are other charged groups.

$R_1, R_2$  and  $R_3$  can also be



where X is O, S, Se or NH.

(V)


A preferred moiety  $R_1$  is trifluoromethyl  $CF_3$  and examples of such diketones are, benzoyltrifluoroacetone, p-chlorobenzoyltrifluoroacetone, p-bromotrifluoroacetone, p-phenyltrifluoroacetone, 1-naphthoyltrifluoroacetone, 2-naphthoyltrifluoroacetone, 2-phenathoyltrifluoroacetone, 3-phenanthoyltrifluoroacetone, 9-



anthrolyltrifluoroacetone, trifluoroacetone, cinnamoyltrifluoroacetone, and 2-thenoyltrifluoroacetone.

The different groups  $L\alpha$  may be the same or different ligands of formulae


5

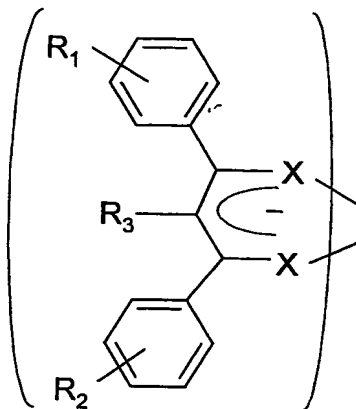

(VI)


where X is O, S, or Se and  $R_1$ ,  $R_2$  and  $R_3$  are as above

10 The different groups  $L\alpha$  may be the same or different quinolate derivatives such as

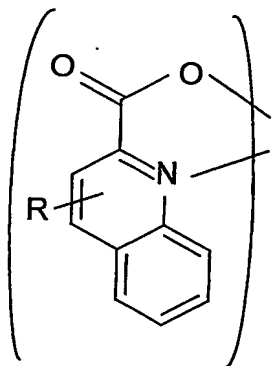

(VII)


or

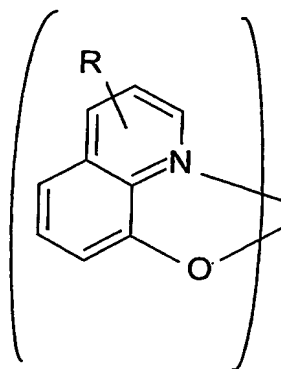


(VIII)

where R is hydrocarbyl, aliphatic, aromatic or heterocyclic carboxy, aryloxy, hydroxy or alkoxy e.g. the 8 hydroxy quinolate derivatives or


- 7 -

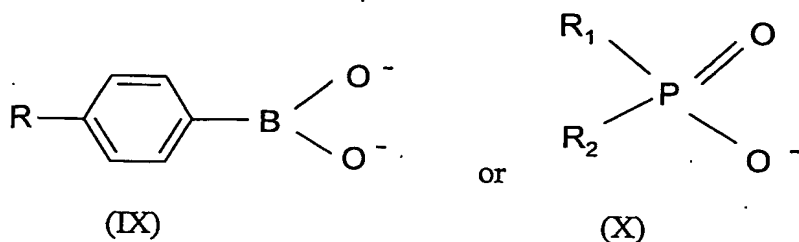

where R, R<sub>1</sub>, and R<sub>2</sub> are as above or are H or F e.g. R<sub>1</sub> and R<sub>2</sub> are alkyl or alkoxy groups

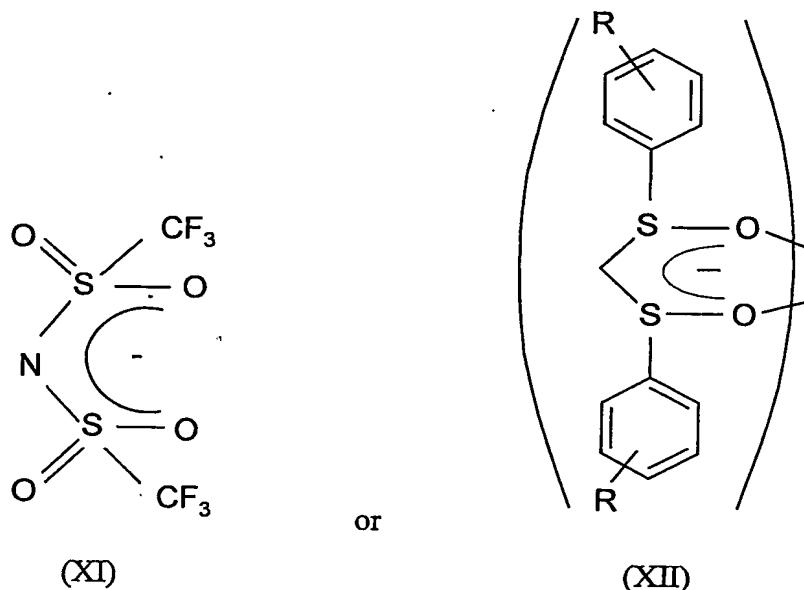


As stated above the different groups L<sub>α</sub> may also be the same or different carboxylate groups e.g.



where R<sub>5</sub> is a substituted or unsubstituted aromatic, polycyclic or heterocyclic ring a polypyridyl group, R<sub>5</sub> can also be a 2-ethyl hexyl group so L<sub>n</sub> is 2-ethylhexanoate or R<sub>5</sub> can be a chair structure so that L<sub>n</sub> is 2-acetyl cyclohexanoate or L<sub>α</sub> can be


- 8 -

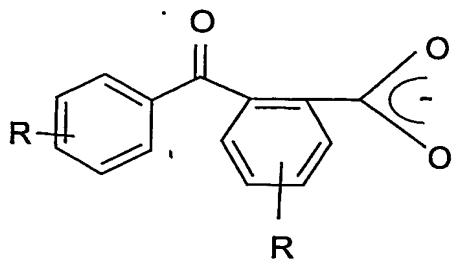


(XIV)

5 where R is as above e.g. alkyl, allenyl, amino or a fused ring such as a cyclic or polycyclic ring.

The different groups  $L\alpha$  may also be

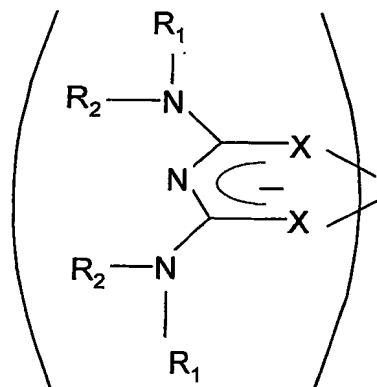

or

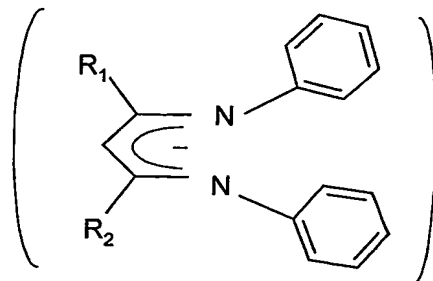


or

10

(XV)


(XVI)

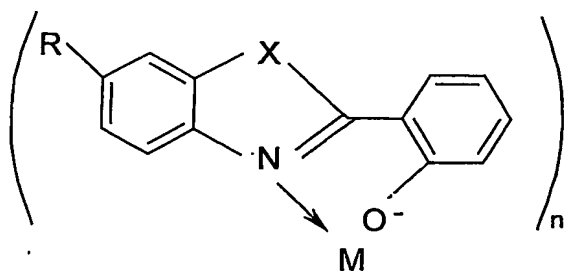

where X is O, S or Se


(XVII)

or




(XVIIa)

Where R, R<sub>1</sub> and R<sub>2</sub> are as above or




(XVIIb)

or




(XVIIc)

5



(XVIIId)


or



(XVIIe)

The groups L<sub>P</sub> in the formula (A) above can be selected from

10

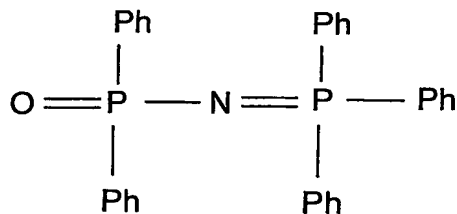

(XVIII)


15

Where each Ph which can be the same or different and can be a phenyl (OPNP) or a substituted phenyl group, other substituted or unsubstituted aromatic group, a substituted or unsubstituted heterocyclic or polycyclic group, a substituted or unsubstituted fused aromatic group such as a naphthyl, anthracene, phenanthrene or pyrene group. The substituents can be for example an alkyl, aralkyl, alkoxy, aromatic, heterocyclic, polycyclic group, halogen such as fluorine, cyano, amino. Substituted amino etc. Examples are given in figs. 1 and 2 of the drawings where R, R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub> and R<sub>4</sub> can be the same or different and are selected from hydrogen, hydrocarbyl

20


- 10 -

- groups, substituted and unsubstituted aromatic, heterocyclic and polycyclic ring structures, fluorocarbons such as trifluoromethyl groups, halogens such as fluorine or thiophenyl groups;  $R$ ,  $R_1$ ,  $R_2$ ,  $R_3$  and  $R_4$  can also form substituted and unsubstituted fused aromatic, heterocyclic and polycyclic ring structures and can be copolymerisable with a monomer e.g. styrene.  $R$ ,  $R_1$ ,  $R_2$ ,  $R_3$  and  $R_4$  can also be unsaturated alkylene groups such as vinyl groups or groups




where  $R$  is as above.

- 10  $L_p$  can also be compounds of formulae

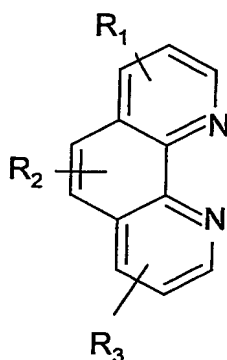


(XVIV)

or

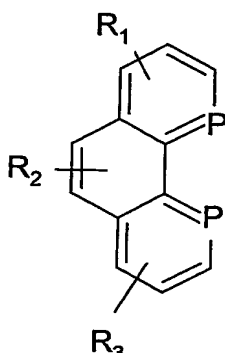

(XX)


or

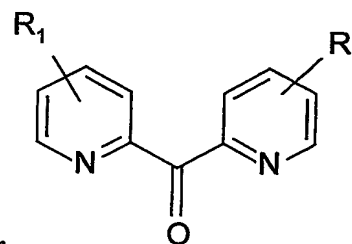


(XXI)

where  $R_1$ ,  $R_2$  and  $R_3$  are as referred to above, for example bathophen shown in fig. 3 of the drawings in which  $R$  is as above or

15





(XXII)

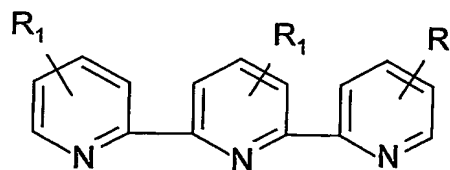

(XXIII)

where  $R_1$ ,  $R_2$  and  $R_3$  are as referred to above.

$L_p$  can also be

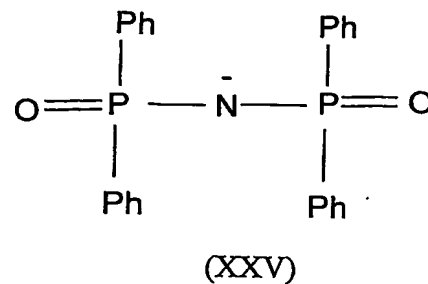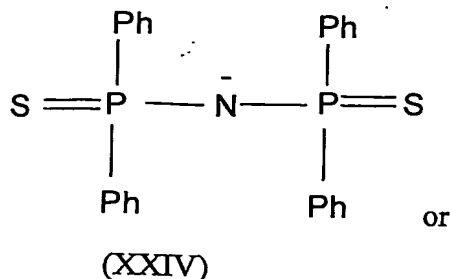

5 where Ph is as above.

Other examples of  $L_p$  chelates are as shown in figs. 4 and fluorene and fluorene derivatives e.g. a shown in figs. 5 and compounds of formulae as shown as shown in figs. 6 to 8.

10


Specific examples of  $L_\alpha$  and  $L_p$  are tripyridyl and TMHD, and TMHD complexes,  $\alpha, \alpha', \alpha''$  tripyridyl, crown ethers, cyclans, cryptans phthalocyanans, porphoryins ethylene diamine tetramine (EDTA), DCTA, DTPA and TTHA. Where TMHD is 2,2,6,6-tetramethyl-3,5-heptanedionato and OPNP is diphenylphosphonimide triphenyl phosphorane. The formulae of the polyamines are shown in fig. 11.

15

A preferred europium complex is  $\text{Eu}(\text{DBM})_3\text{OPNP}$ .

20

Preferred iridium complexes are iridium acetylacetonate, iridium di-acetylacetonate and  $\text{Ir}(\text{dpp})_3$ .

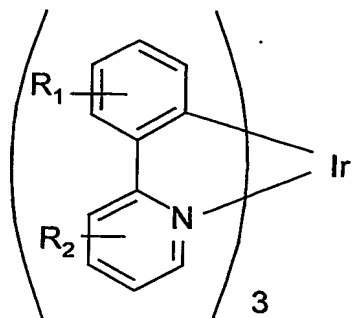


where  $R_1$  and  $R_2$  are as above.

- 5 The first electrode can function as the cathode and the second electrode can function as the anode and preferably there is a layer of a hole transporting material between the anode and the layer of the electroluminescent compound.


10 The hole transporting material can be any of the hole transporting materials used in electroluminescent devices.

The hole transporting material can be an amine complex such as poly (vinylcarbazole), N, N'-diphenyl-N, N'-bis (3-methylphenyl) -1,1' -biphenyl -4,4'-diamine (TPD), an unsubstituted or substituted polymer of an amino substituted aromatic compound, a polyaniline, substituted polyanilines, polythiophenes, substituted polythiophenes, polysilanes etc. Examples of polyanilines are polymers of




(XXVI)

where R is in the ortho - or meta-position and is hydrogen, C1-18 alkyl, C1-6 alkoxy, amino, chloro, bromo, hydroxy or the group



- 5 where R is alkyl or aryl and R' is hydrogen, C1-6 alkyl or aryl with at least one other monomer of formula I above.

Or the hole transporting material can be a polyaniline, polyanilines which can be used in the present invention have the general formula

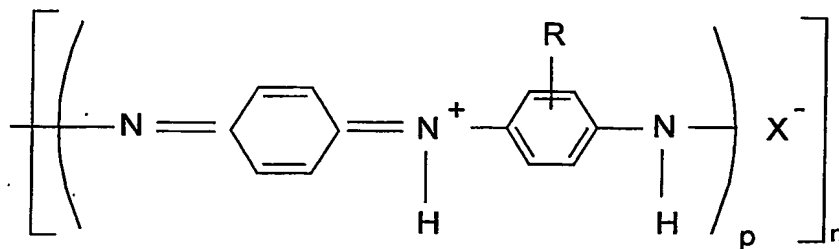

10

(XXVII)

- where p is from 1 to 10 and n is from 1 to 20, R is as defined above and X is an anion, preferably selected from Cl, Br, SO<sub>4</sub>, BF<sub>4</sub>, PF<sub>6</sub>, H<sub>2</sub>PO<sub>3</sub>, H<sub>2</sub>PO<sub>4</sub>, arylsulphonate, arenedicarboxylate, polystyrenesulphonate, polyacrylate alkylsulphonate, vinylsulphonate, vinylbenzene sulphonate, cellulose sulphonate, camphor sulphonates, cellulose sulphate or a perfluorinated polyanion.
- 15

- Examples of arylsulphonates are p-toluenesulphonate, benzenesulphonate, 9,10-anthraquinone-sulphonate and anthracenesulphonate, an example of an arenedicarboxylate is phthalate and an example of arenecarboxylate is benzoate.
- 20

We have found that protonated polymers of the unsubstituted or substituted polymer of an amino substituted aromatic compound such as a polyaniline are difficult to



evaporate or cannot be evaporated, however we have surprisingly found that if the unsubstituted or substituted polymer of an amino substituted aromatic compound is deprotonated the it can be easily evaporated i.e. the polymer is evaporable.

- 5 Preferably evaporable deprotonated polymers of unsubstituted or substituted polymer of an amino substituted aromatic compound are used. The de-protonated unsubstituted or substituted polymer of an amino substituted aromatic compound can be formed by deprotonating the polymer by treatment with an alkali such as ammonium hydroxide or an alkali metal hydroxide such as sodium hydroxide or  
10 potassium hydroxide.


The degree of protonation can be controlled by forming a protonated polyaniline and de-protonating. Methods of preparing polyanilines are described in the article by A. G. MacDiarmid and A. F. Epstein, Faraday Discussions, Chem Soc.88 P319 1989.

15

The conductivity of the polyaniline is dependant on the degree of protonation with the maximum conductivity being when the degree of protonation is between 40 and 60% e.g. about 50% for example.

- 20 Preferably the polymer is substantially fully deprotonated

A polyaniline can be formed of octamer units i.e. p is four e.g.



- 25 The polyanilines can have conductivities of the order of  $1 \times 10^{-1}$  Siemen  $\text{cm}^{-1}$  or higher.

The aromatic rings can be unsubstituted or substituted e.g. by a C1 to 20 alkyl group such as ethyl.

5 The polyaniline can be a copolymer of aniline and preferred copolymers are the copolymers of aniline with o-anisidine, m-sulphanilic acid or o-aminophenol, or o-toluidine with o-aminophenol, o-ethylaniline, o-phenylene diamine or with amino anthracenes.

10 Other polymers of an amino substituted aromatic compound which can be used include substituted or unsubstituted polyaminonaphthalenes, polyaminoanthracenes, polyaminophenanthrenes, etc. and polymers of any other condensed polyaromatic compound. Polyaminoanthracenes and methods of making them are disclosed in US Patent 6,153,726. The aromatic rings can be unsubstituted or substituted e.g. by a group R as defined above.

15 Other hole transporting materials are conjugated polymer and the conjugated polymers which can be used can be any of the conjugated polymers disclosed or referred to in US 5807627, PCT/WO90/13148 and PCT/WO92/03490.

20 The preferred conjugated polymers are poly (p-phenylenevinylene)-PPV and copolymers including PPV. Other preferred polymers are poly(2,5 dialkoxyphenylene vinylene) such as poly (2-methoxy-5-(2-methoxypentyloxy-1,4-phenylene vinylene), poly(2-methoxypentyloxy)-1,4-phenylenevinylene), poly(2-methoxy-5-(2-dodecyloxy-1,4-phenylenevinylene) and other poly(2,5 dialkoxyphenylenevinylenes)  
25 with at least one of the alkoxy groups being a long chain solubilising alkoxy group, poly fluorenes and oligofluorenes; polyphenylenes and oligophenylenes, polyanthracenes and oligo anthracenes, ploythiophenes and oligothiophenes.

In PPV the phenylene ring may optionally carry one or more substituents e.g. each independently selected from alkyl, preferably methyl, alkoxy, preferably methoxy or ethoxy.

- 5 Any poly(arylenevinylene) including substituted derivatives thereof can be used and the phenylene ring in poly(p-phenylenevinylene) may be replaced by a fused ring system such as anthracene or naphthylene ring and the number of vinylene groups in each polyphenylenevinylene moiety can be increased e.g. up to 7 or higher.
- 10 The conjugated polymers can be made by the methods disclosed in US 5807627, PCT/WO90/13148 and PCT/WO92/03490.

The thickness of the hole transporting layer is preferably 20nm to 200nm.

- 15 The polymers of an amino substituted aromatic compound such as polyanilines referred to above can also be used as buffer layers with or in conjunction with other hole transporting materials.

- 20 The structural formulae of some other hole transporting materials are shown in Figures 12 to 16 of the drawings, where  $R_1$ ,  $R_2$  and  $R_3$  can be the same or different and are selected from hydrogen, and substituted and unsubstituted hydrocarbyl groups such as substituted and unsubstituted aliphatic groups, substituted and unsubstituted aromatic, heterocyclic and polycyclic ring structures, fluorocarbons such as trifluoromethyl groups, halogens such as fluorine or thiophenyl groups;  $R_1$ ,  $R_2$  and  $R_3$  can
- 25 also form substituted and unsubstituted fused aromatic, heterocyclic and polycyclic ring structures and can be copolymerisable with a monomer e.g. styrene. X is Se, S or O, Y can be hydrogen, substituted or unsubstituted hydrocarbyl groups, such as substituted and unsubstituted aromatic, heterocyclic and polycyclic ring structures, fluorine, fluorocarbons such as trifluoromethyl groups, halogens such as fluorine or
- 30 thiophenyl groups or nitrile.

Examples of  $R_1$  and/or  $R_2$  and/or  $R_3$  include aliphatic, aromatic and heterocyclic alkoxy, aryloxy and carboxy groups, substituted and substituted phenyl, fluorophenyl, biphenyl, phenanthrene, anthracene, naphthyl and fluorene groups alkyl groups such as t-butyl, heterocyclic groups such as carbazole.

In an embodiment of the invention the hole transporting material is mixed with the electroluminescent compound in the electroluminescent layer and a preferred electroluminescent compound is CBP which has the formula of fig. 4b the drawings.

There can be a buffer layer between the anode and the hole transporting layer and any of the hole transporting materials listed above can be used.

Optionally there is a layer of an electron injecting material between the cathode and the electroluminescent material layer, the electron injecting material is a material which will transport electrons when an electric current is passed through electron injecting materials include a metal complex such as a metal quinolate e.g. an aluminium quinolate, lithium quinolate,  $Mx(DBM)_n$  where  $Mx$  is a metal and DBM is dibenzoyl methane and  $n$  is the valency of  $Mx$  e.g  $Mx$  is chromium. The electron injecting material can also be a cyano anthracene such as 9,10 dicyano anthracene, cyano substituted aromatic compounds, tetracyanoquinodimethane a polystyrene sulphonate or a compound with the structural formulae shown in figures 9 or 10 of the drawings in which the phenyl rings can be substituted with substituents  $R$  as defined above. Instead of being a separate layer the electron injecting material can be mixed with the electroluminescent material and co-deposited with it.

Optionally the hole transporting material can be mixed with the electroluminescent material and co-deposited with it.

The hole transporting materials, the electroluminescent material and the electron injecting materials can be mixed together to form one layer, which simplifies the construction.

- 5 The anode is preferably a transparent substrate such as a conductive glass or plastic material which acts as the anode, preferred substrates are conductive glasses such as indium tin oxide coated glass, but any glass which is conductive or has a conductive layer such as a metal or conductive polymer can be used. Conductive polymers and conductive polymer coated glass or plastics materials can also be used as the
- 10 substrate.

- The cathode is preferably a low work function metal e.g. aluminium, calcium, lithium, magnesium and alloys thereof such as silver/magnesium alloys, rare earth metal alloys etc., aluminium is a preferred metal. A metal fluoride such as an alkali
- 15 metal, rare earth metal or their alloys can be used as the second electrode for example by having a metal fluoride layer formed on a metal.

- The electroluminescent europium metal complex or organo metallic complex mixed with an iridium metal complex or organo metallic complex can be in a host
- 20 compound with a wider band gap than the europium complex such as those shown in fig. 4 e.g. R is H which is referred to as CBP.

- A structure comprises (i) a first electrode (ii) a layer of a hole transporting (iii) a layer of an electroluminescent europium metal complex or organo metallic complex mixed
- 25 with an iridium metal complex or organo metallic complex (iv) an electron transmitting layer and (v) a second electrode and preferably there is also one or more layers of a europium electroluminescent metal complex or organo metallic complex adjacent the layer (iii).

Optionally there can be other layers such as buffer layers in order that the holes and electrons combine in the electroluminescent layer and to improve the overall performance of the device.


5 The invention is illustrated in the examples.

### Example 1

10 An electroluminescent device shown in fig. 17a was formed by a process in which an (indium tin oxide) ITO coated glass piece ( $1 \times 1\text{cm}^2$ ) had a portion etched out with concentrated hydrochloric acid to remove the ITO and was cleaned and dried. The device was fabricated by sequentially forming on the ITO, by vacuum evaporation at  $1 \times 10^{-5}$  Torr., layers 1 to 7 where (1) is ITO, (2) is CuPc (3) is  $\alpha$ -NPB (4) is the electroluminescent mixture (5) is  $\text{Eu}(\text{DBM})_3\text{OPNP}$  (6) is  $\text{Alq}_3$  (7) is Al to form :-

15 ITO/CuPc(8nm)/ $\alpha$ -NPB(40nm)/R1(10nm)/R1(40%)+ $\text{Ir}(\text{dpp})_3$ (6%)+CBP(20nm)/R1(20nm)/BCP(6nm)/ $\text{Alq}_3$ (20nm)/Al

Where R1 is  $\text{Eu}(\text{DBM})_3\text{OPNP}$  and  $\text{Ir}(\text{dpp})_3$  is



20 An electric current was passed through the device and the properties of the emitted light measured and the results are shown in the table 1 and in figs.18 and 21 to 25 of the drawings.

### Example 2

A device was constructed as in example 1 which had the structure as shown in fig. 17b in which (1) is ITO, (2) is CuPc (3) is  $\alpha$ -NPB (4) is the electroluminescent mixture (5) is Eu(DBM)<sub>3</sub>OPNP (6) is BCP (7) is Alq<sub>3</sub> (8) is aluminium to form :-

ITO/CuPc(8nm)/ $\alpha$ -NPB(40nm)/ Ir(diacac)<sub>2</sub>(dpp)<sub>2</sub>(6%)+CBP+R1(20nm)  
/R1(20nm)/BCP(6nm)/Alq3(20nm)/Al

Where Ir(diacac)<sub>3</sub> is iridium di-acetylacetonate and CBP is shown in fig. 4b with R being H and is a host compound.

10 An electric current was passed through the device and the properties of the emitted light measured and the results are shown the Table and in figs. 19 and 21 to 25 of the drawings .

### Example 3

15

A device was constructed as in example 1 which had the structure ITO/CuPc(8nm)/ $\alpha$ -NPB(40nm)/R1(40%)+Ir(acac)<sub>3</sub>(6%)+CBP(20nm) BCP(6nm)/Alq3(20nm)/Al

Where Ir(acac)<sub>3</sub> is iridium acetylacetonate and BCP is bathocupron.

20 An electric current was passed through the device and the properties of the emitted light measured and the results are shown in the Table and in figs. 20 to 25 of the drawings.

Table


Best Current Efficiency			
Ref.	cd A <sup>-1</sup>	x	y
F2Y- Example 1	3.0	0.63	0.35
F3G - Example 2	1.8	0.66	0.33
F2M - Example 3	0.8	0.63	0.34



## Claims

1. An electroluminescent device which comprises (i) a first electrode (ii) a layer of an electroluminescent europium metal complex or organo metallic complex mixed with an iridium metal complex or organo metallic complex and (iii) a second electrode.
2. An electroluminescent device which comprises (i) a first electrode (ii) a layer of an electroluminescent europium metal complex or organo metallic complex (iii) a layer of an electroluminescent europium metal complex or organo metallic complex mixed with an iridium metal complex or organo metallic complex and (iv) a second electrode;
3. An electroluminescent device which comprises (i) a first electrode (ii) a layer of an electroluminescent europium metal complex or organo metallic complex mixed with an iridium metal complex or organo metallic complex (iii) a layer of an electroluminescent europium metal complex or organo metallic complex and (iv) a second electrode;
4. An electroluminescent device which comprises (i) a first electrode (ii) a layer of an electroluminescent europium metal complex or organo metallic complex (iii) a layer of an electroluminescent europium metal complex or organo metallic complex mixed with an iridium metal complex or organo metallic complex (iv) a layer of an electroluminescent europium metal complex or organo metallic complex and (v) a second electrode.
5. An electroluminescent device as claimed in any one of claims 1 to 3 in which the europium metal complex or organo metallic complex has the formula  $(L\alpha)_3\text{Eu}$  where  $L\alpha$  is an organic complex.

6. An electroluminescent device as claimed in any one of claims 1 to 3 in which the europium metal complex or organo metallic complex has the formula



(A)

5 where  $L\alpha$  and  $Lp$  are organic ligands and  $Lp$  is a neutral ligand, the ligands  $L\alpha$  can be the same or different and there can be a plurality of ligands  $Lp$  which can be the same or different.

10 7. An electroluminescent device as claimed in any one of claims 1 to 3 in which the europium metal complex or organo metallic complex has the formula  $(L\alpha)_n Eu M_2$  where  $M_2$  is a non rare earth metal,  $L\alpha$  is as above and  $n$  is the combined valence state of  $Eu$  and  $M_2$ .

15 8. An electroluminescent device as claimed in any one of claims 1 to 3 in which the europium metal complex or organo metallic complex has the formula formula  $(L\alpha)_n Eu M_2 (Lp)$ , where  $Lp$  is as above.

20 9. An electroluminescent device as claimed in claim 9 in which the metal  $M_2$  can be any metal which is not a rare earth, transition metal, lanthanide or an actinide.

25 10. An electroluminescent device as claimed in claim 9 in which the metal  $M_2$  is selected from lithium, sodium, potassium, rubidium, caesium, beryllium, magnesium, calcium, strontium, barium, boron, copper (I), copper (II), silver, gold, zinc, cadmium, boron, aluminium, gallium, indium, germanium, tin (II), tin (IV), antimony (II), antimony (IV), lead (II), lead (IV) and metals of the first, second and third groups of transition metals in different valence states e.g. manganese, iron, ruthenium, osmium, cobalt, nickel, palladium(II), palladium(IV), platinum(II), platinum(IV), cadmium, chromium, titanium, vanadium, zirconium, hafnium, tantalum, molybdenum, rhodium, iridium, titanium, niobium, scandium, yttrium.

11. An electroluminescent device as claimed in any one of claims 1 to 10 in which  $L\alpha$  is of formula (I) to (XVII) herein.
- 5 12. An electroluminescent device as claimed in any one of claims 1 to 10 in which  $Lp$  is of formula (XVIII) to (XXV) herein or figs. 1 to 9 of the drawings
- 10 13. An electroluminescent device as claimed in any one of claims 1 to 12 in which  $L\alpha$  is selected from tripyridyl and TMHD, and TMHD complexes,  $\alpha$ ,  $\alpha'$ ,  $\alpha''$  tripyridyl and  $Lp$  is selected from crown ethers, cyclans, cryptans phthalocyanans, porphoryins ethylene diamine tetramine (EDTA), DCTA, DTPA and TTHA.
14. An electroluminescent device as claimed in any one of claims 1 to 13 in which the europium complex is  $Eu(DBM)_3OPNP$ .
- 15 15. An electroluminescent device as claimed in any one of claims 1 to 14 in which the iridium complex is iridium acetyl acetonate or  $Ir(dpp)_3$ .
- 20 16. An electroluminescent device as claimed in any one of claims 1 to 14 in which the the electroluminescent europium metal complex or organo metallic complex mixed with an iridium metal complex or organo metallic complex is in a host compound with a wider band gap than the europium complex.
- 25 17. An electroluminescent device as claimed any one of claims 1 to 16 in which there is a layer of a hole transmitting material between the first electrode and the electroluminescent layer.
18. An electroluminescent device as claimed any one of claims 1 to 16 in which there is a hole transmitting material in an a electroluminescent layer.

19. An electroluminescent device as claimed in claim 17 or 18 in which the hole transmitting material is an aromatic amine complex.

5 20. An electroluminescent device as claimed in claim 19 in which the hole transmitting material is polyaromatic amine complex.

10 21. An electroluminescent device as claimed in claim 17 or 18 in which the hole transmitting material is a film of a polymer selected from poly(vinylcarbazole), N,N'-diphenyl-N,N'-bis (3-methylphenyl) -1,1' -biphenyl -4,4'-diamine (TPD), polyaniline, substituted polyanilines, polythiophenes, substituted polythiophenes, polysilanes and substituted polysilanes.

15 22. An electroluminescent device as claimed in claim 17 or 18 in which the hole transmitting material is a film of a compound of formula (XXVI) or (XXVII) herein or as in figures 4 to 8 of the drawings.

20 23. An electroluminescent device as claimed in claim 17 or 18 in which the hole transmitting material is a copolymer of aniline, a copolymer of aniline with o-anisidine, m-sulphanilic acid or o-aminophenol, or o-toluidine with o-aminophenol, o-ethylaniline, o-phenylene diamine or with an amino anthracene.

25 24. An electroluminescent device as claimed in claim 17 or 18 in which the hole transmitting material is a conjugated polymer.

25 25. An electroluminescent device as claimed in claim 24 in which the conjugated polymer is selected from poly (p-phenylenevinylene)-PPV and copolymers including PPV, poly(2,5 dialkoxyphenylene vinylene), poly (2-methoxy-5-(2-

methoxypentyloxy-1,4-phenylene vinylene), poly(2-methoxypentyloxy)-1,4-phenylenevinylene), poly(2-methoxy-5-(2-dodecyloxy-1,4-phenylenevinylene) and other poly(2,5 dialkoxyphenylenevinylenes) with at least one of the alkoxy groups being a long chain solubilising alkoxy group, poly fluorenes and oligofluorenes, polyphenylenes and oligophenylenes, polyanthracenes and oligo anthracenes, ploythiophenes and oligothiophenes.

26. An electroluminescent device as claimed in any one of claims 1 to 25 in which there is a layer of an electron transmitting material between the cathode and the electroluminescent compound layer.

27. An electroluminescent device as claimed in claim 26 in which the electron transmitting material is a metal quinolate.

28. An electroluminescent device as claimed in claim 25 in which the metal quinolate is an aluminium quinolate or lithium quinolate

29. An electroluminescent device as claimed in claim 26 in which the electron transmitting material is of formula  $Mx(DBM)_n$  where Mx is a metal and DBM is dibenzoyl methane and n is the valency of Mx.

30. An electroluminescent device as claimed in claim 26 in which the electron transmitting material is a cyano anthracene such as 9,10 dicyano anthracene, a polystyrene sulphonate or a compound of formulae shown in figure 2 or 3 of the drawings.

31. An electroluminescent device as claimed in any one of claims 26 to 30 in which the electron transmitting material is mixed with the electroluminescent compound.

- 27 -

32. An electroluminescent device as claimed in any one of the claims 1 to 31 in which the first electrode is a transparent electricity conducting glass electrode.

5 33. An electroluminescent device as claimed in any one of the claims 1 to 32 in which the second electrode is selected from aluminium, calcium, lithium, magnesium and alloys thereof and silver/magnesium alloys.

- 28 -

### Abstract

An electroluminescent device emitting red light has an electroluminescent layer comprising a europium organometallic complex mixed with an iridium complex.

5

10

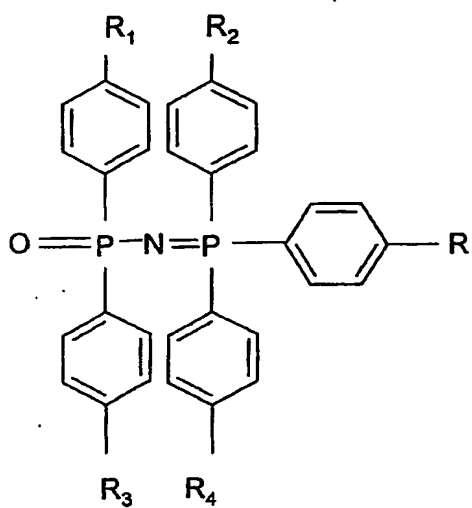


Fig. 1

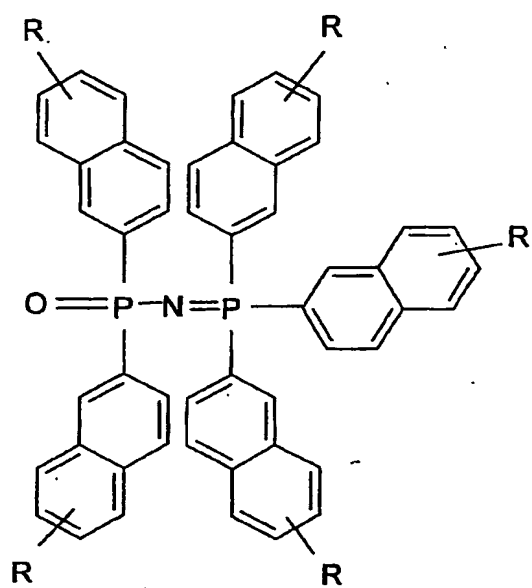


Fig. 2a

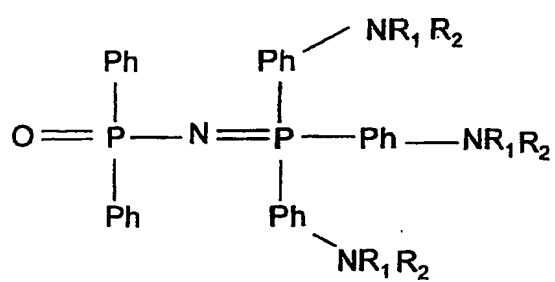


Fig. 2b

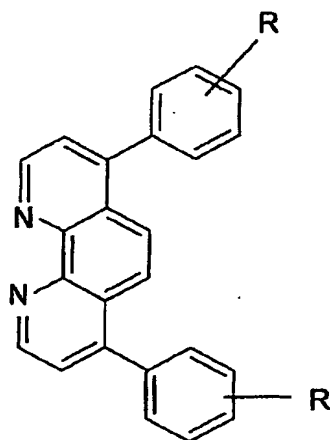


Fig. 3



2/25

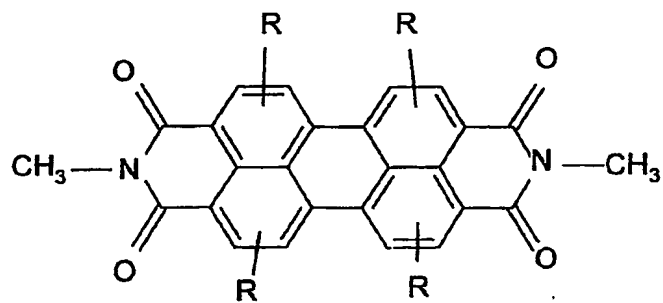


Fig. 4a

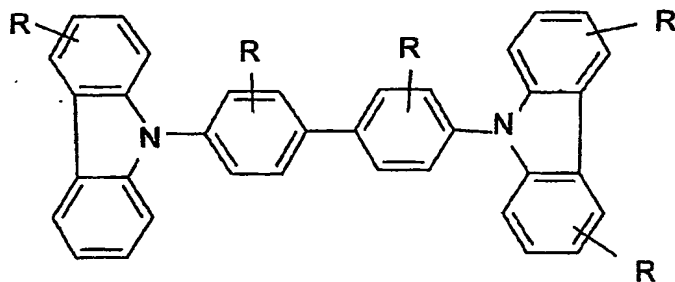


Fig. 4b

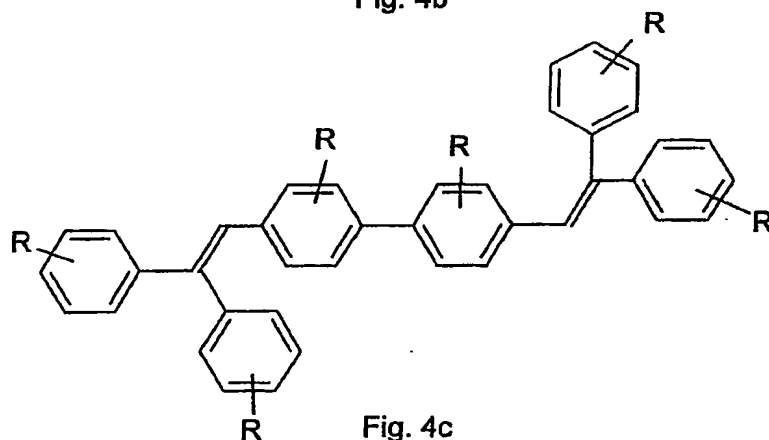


Fig. 4c

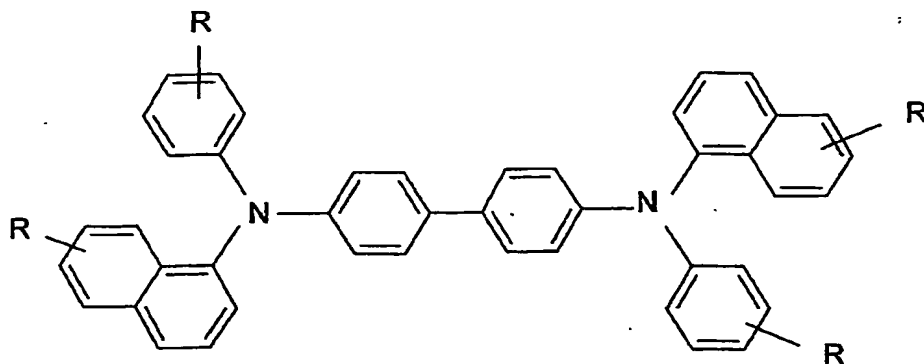


Fig. 4d

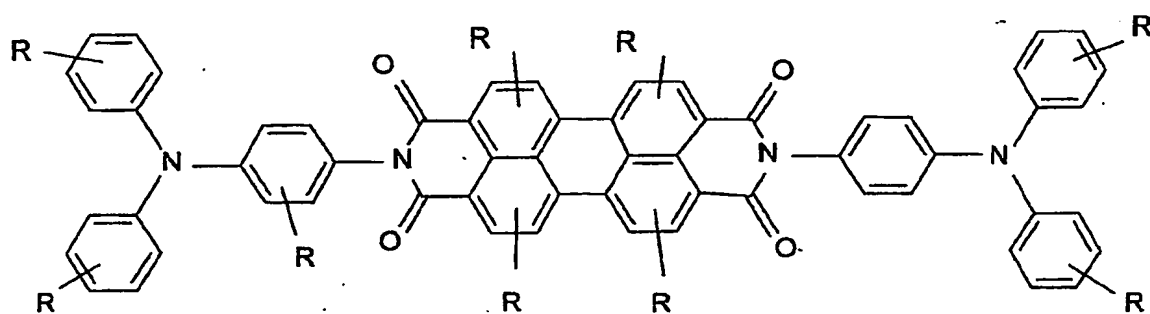


Fig. 4e

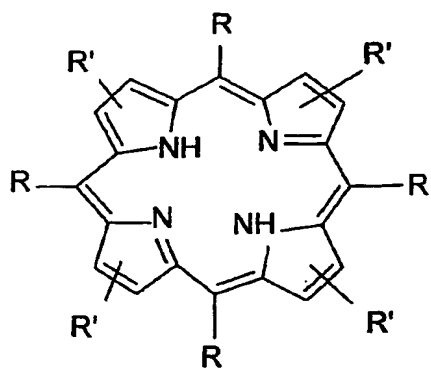


Fig. 4f

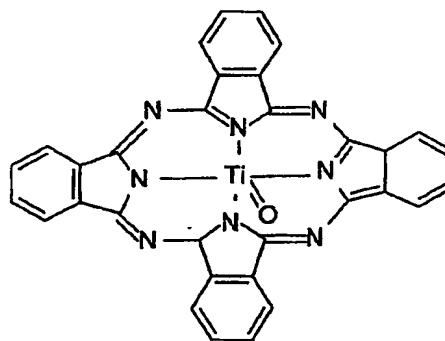


Fig. 4g

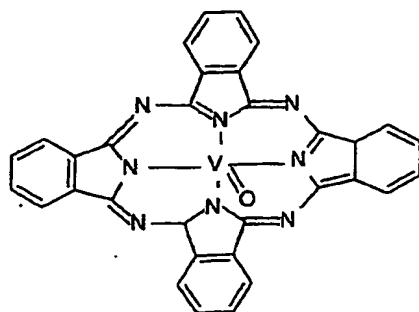


Fig. 4h

4/25

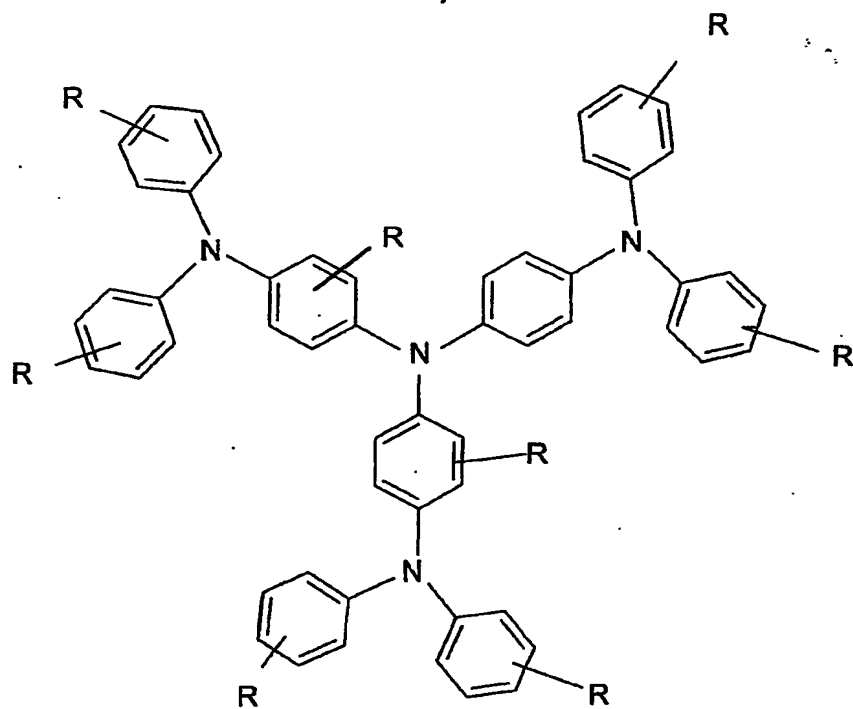


Fig. 4i

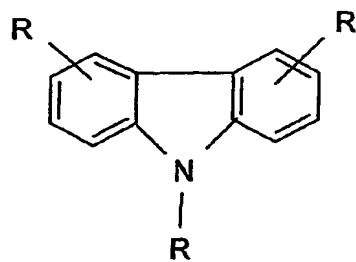


Fig. 4j

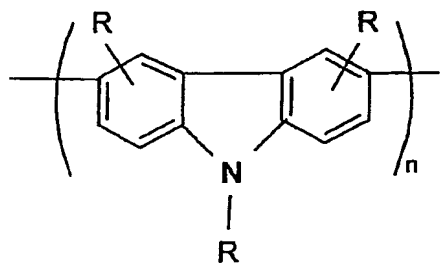


Fig. 4k

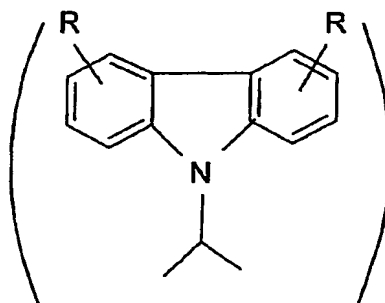


Fig. 4l




Fig. 5a

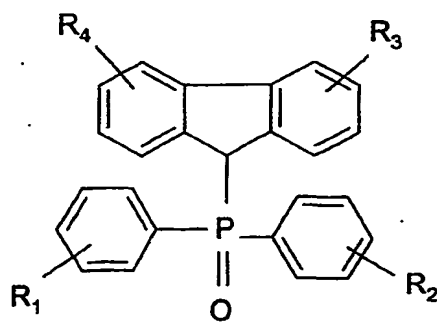


Fig. 5b

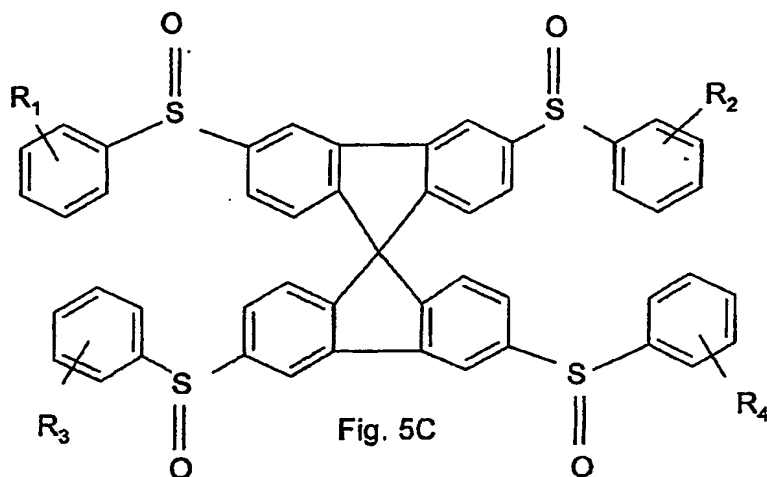


Fig. 5c

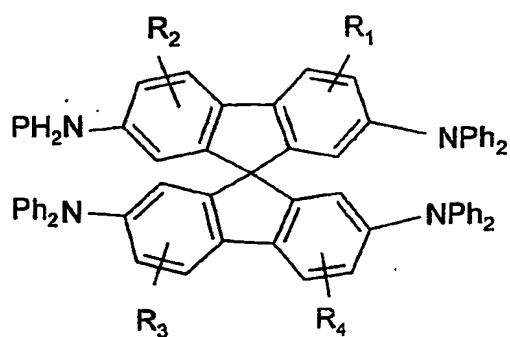


Fig. 5d

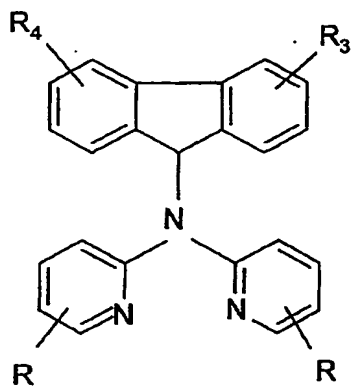


Fig. 5f

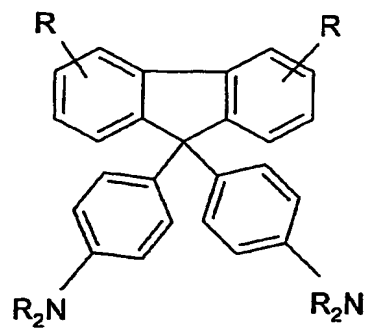


Fig. 5g




Fig. 6a




Fig 6b

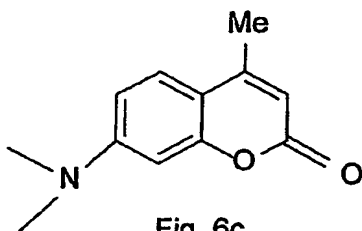


Fig. 6c

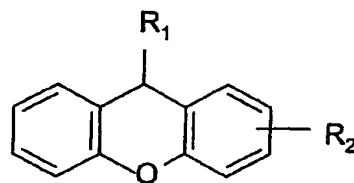


Fig. 6d

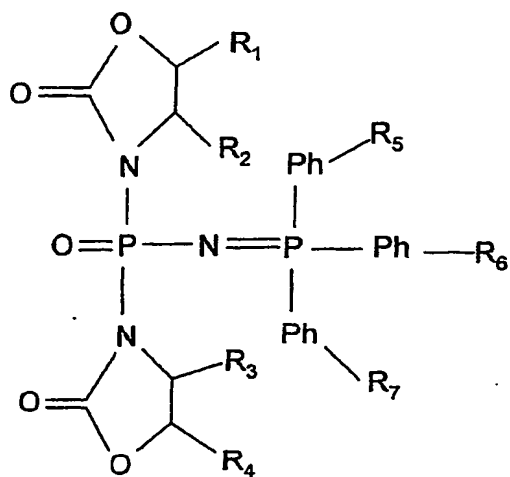


Fig. 6e

7/25

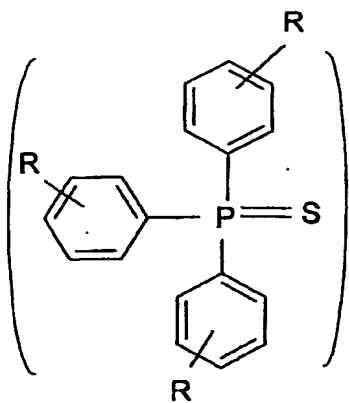


Fig. 7a

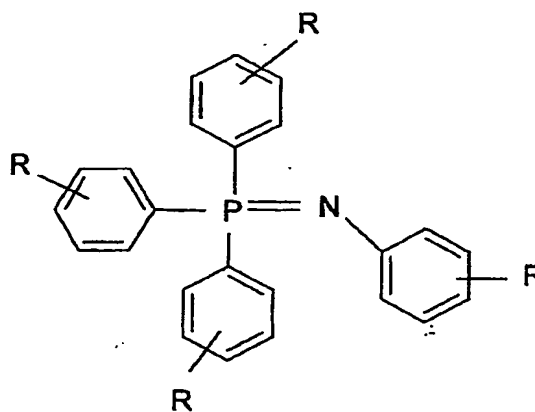


Fig. 7b

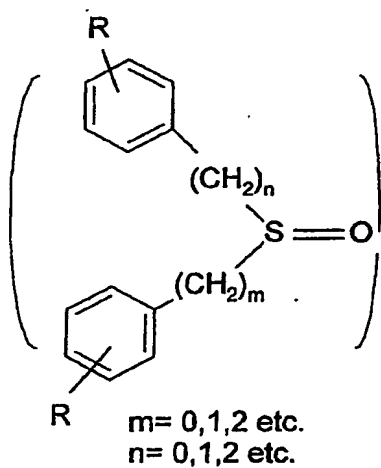


Fig. 7c

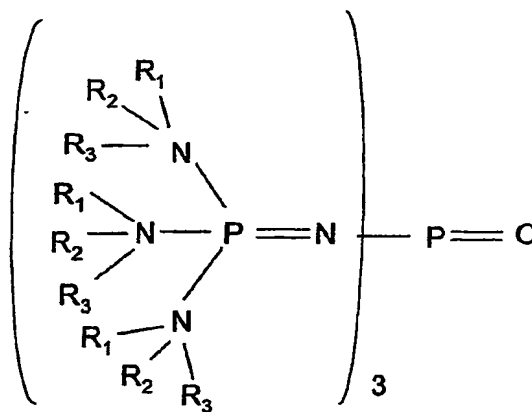


Fig. 7d




Fig. 7e

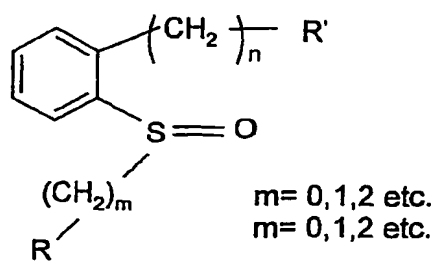


Fig. 7f




Fig. 8a

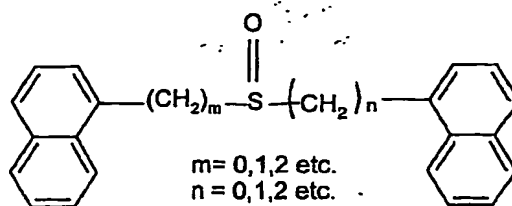


Fig. 8b

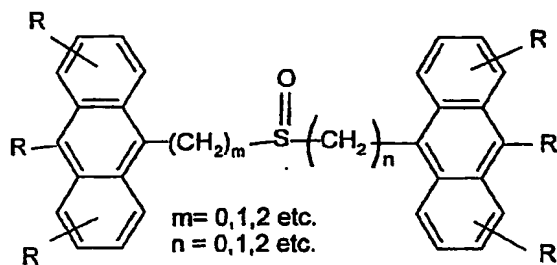


Fig. 8c

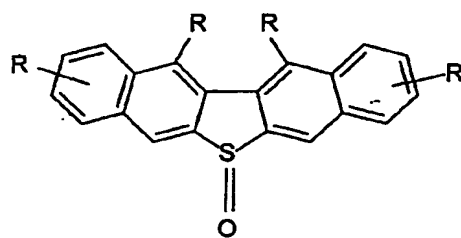


Fig. 8d




Fig. 8e

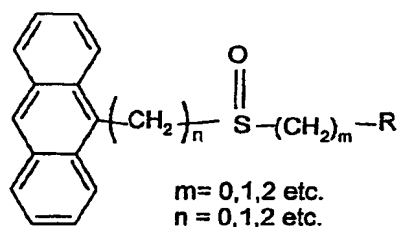


Fig. 8f

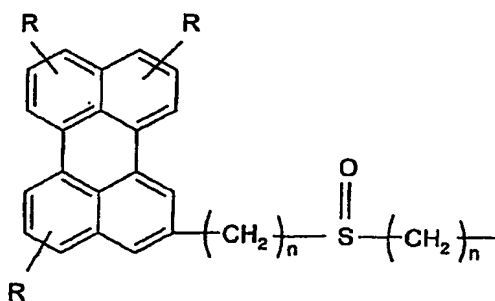


Fig. 8g



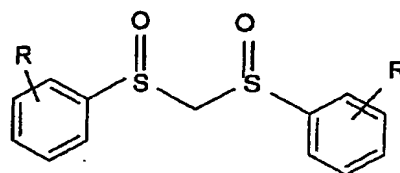


Fig. 8g


9/25

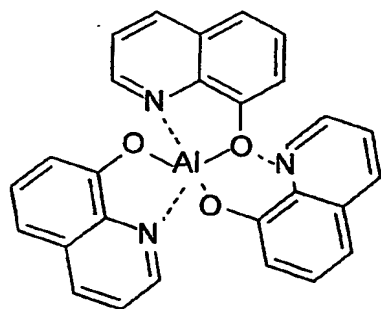


Alq

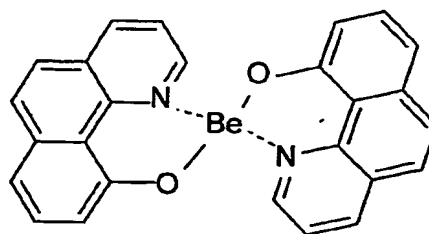


Bebq

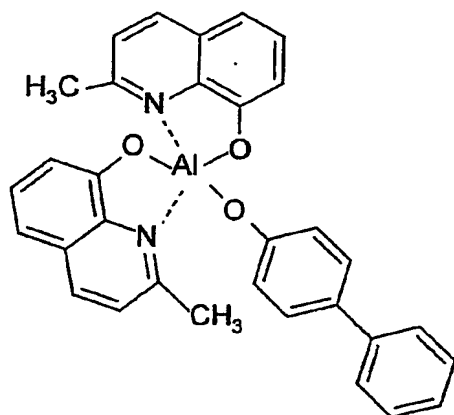


BAlq1

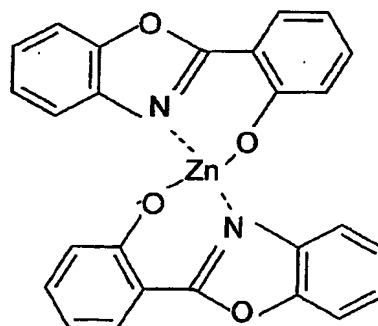

ZnPBO

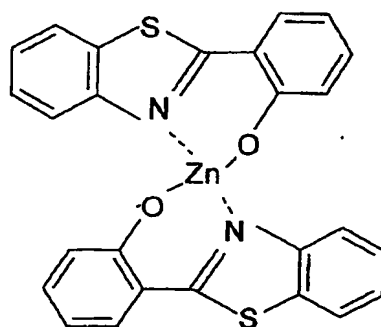

ZnPBT

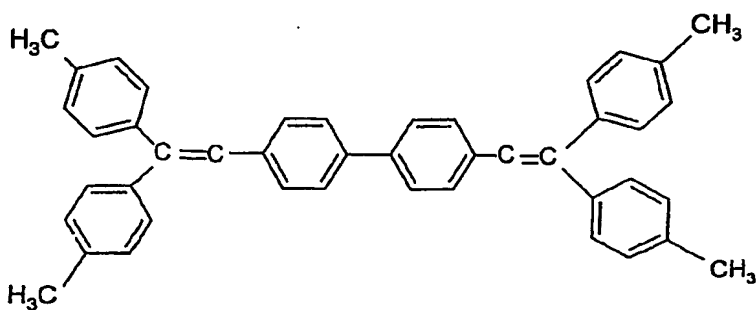


DTVb1


Fig. 9




10/25




t-Bu-PBD

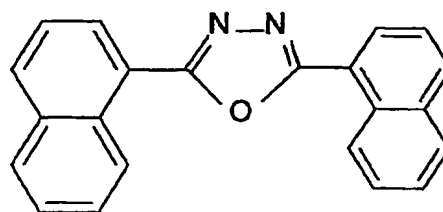


BND

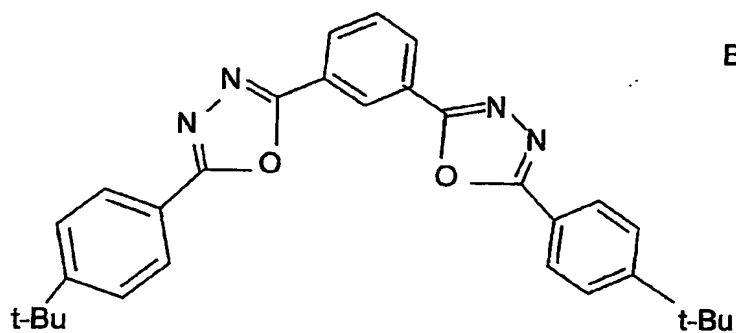

OXD-7

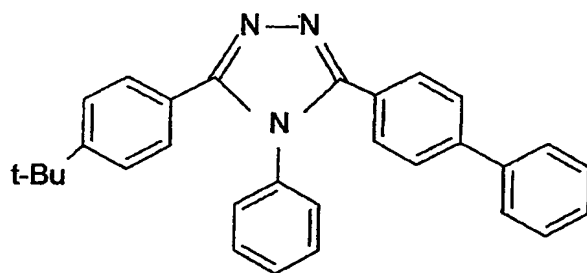


TAZ

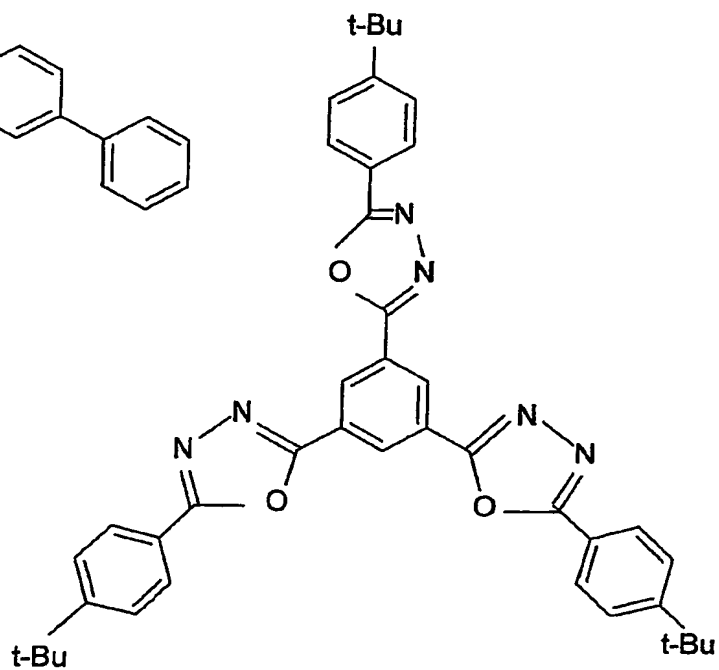


OXD-Star

Fig. 10


11/25

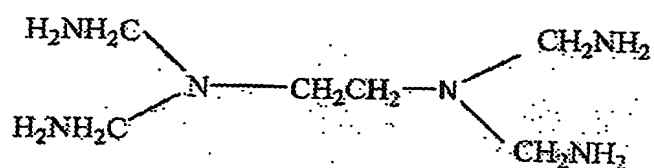


EDTA

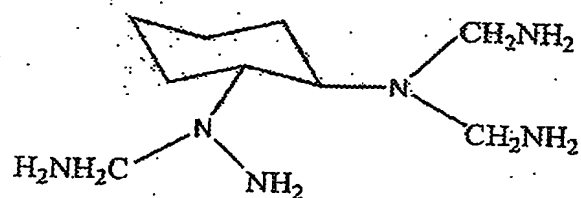

DCTA

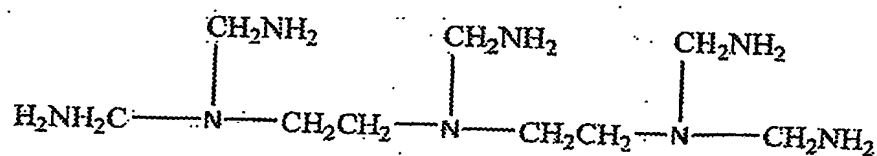

DTPA

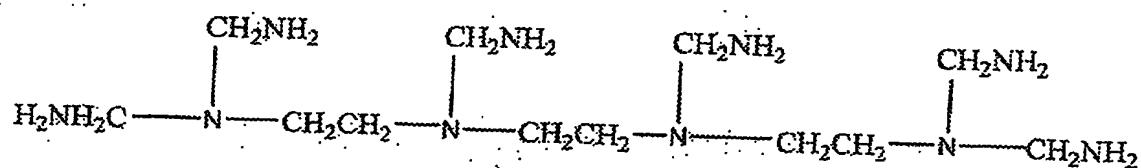

TTHA

Fig. 11

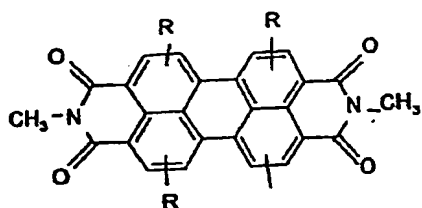


Fig. 12a

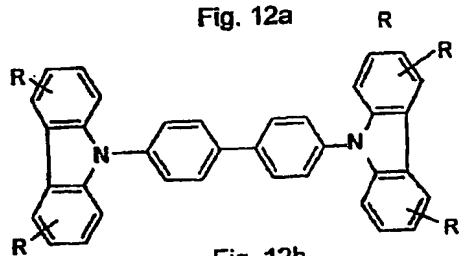


Fig. 12b

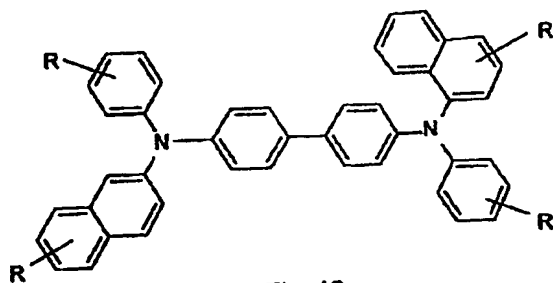


Fig. 12c

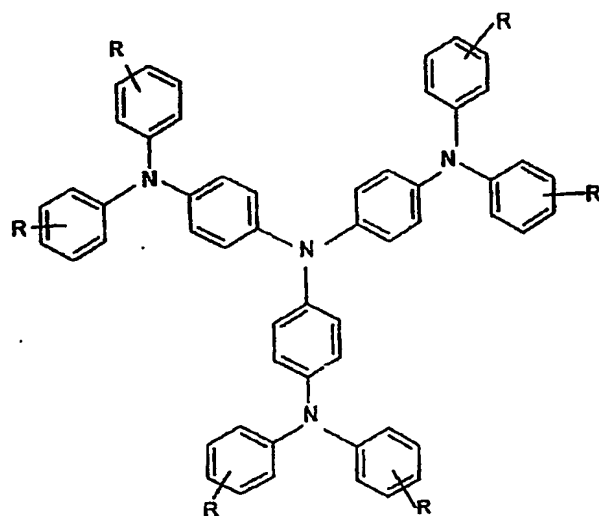


Fig. 12d

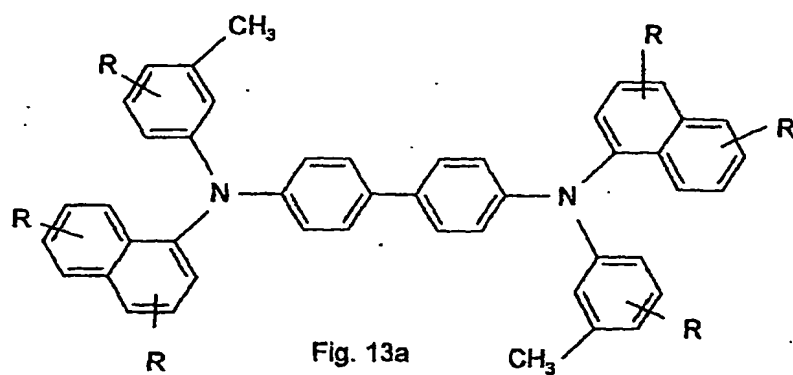


Fig. 13a

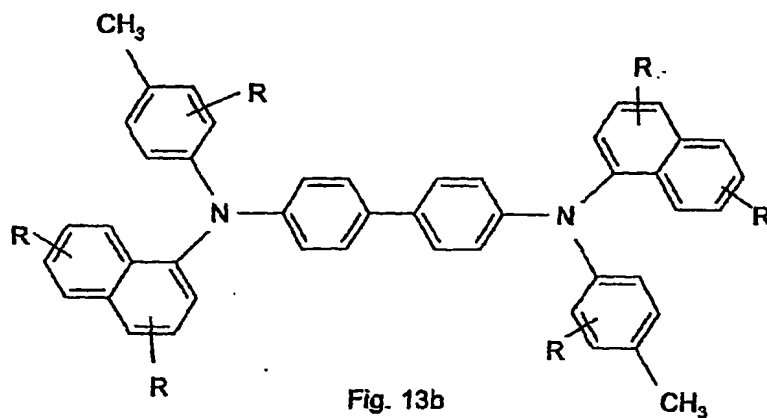


Fig. 13b

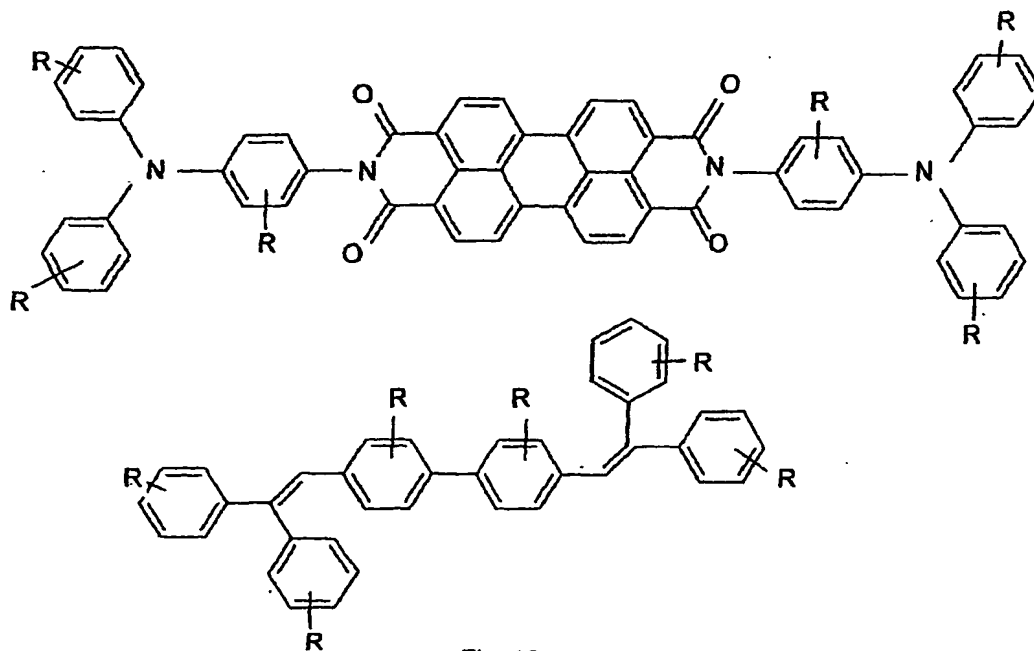


Fig. 13c

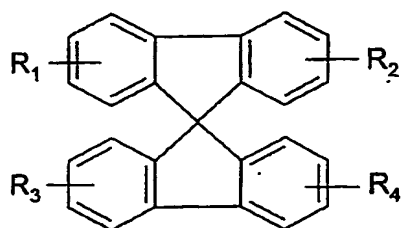


Fig. 14a





Fig. 14b

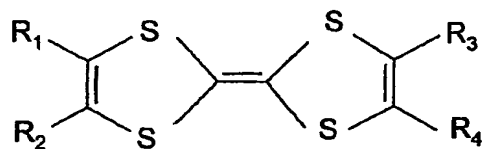

or

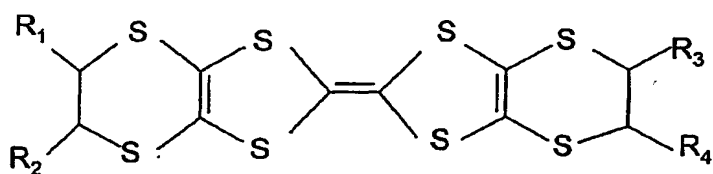


Fig. 14c

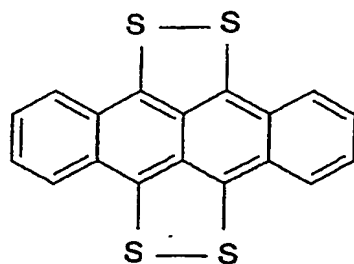


Fig. 14d

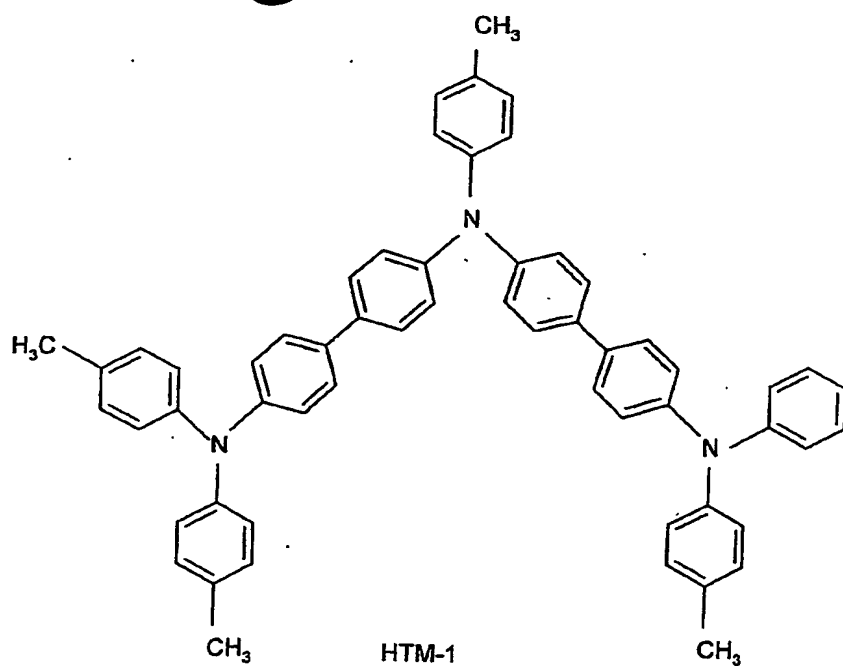


Fig. 15a



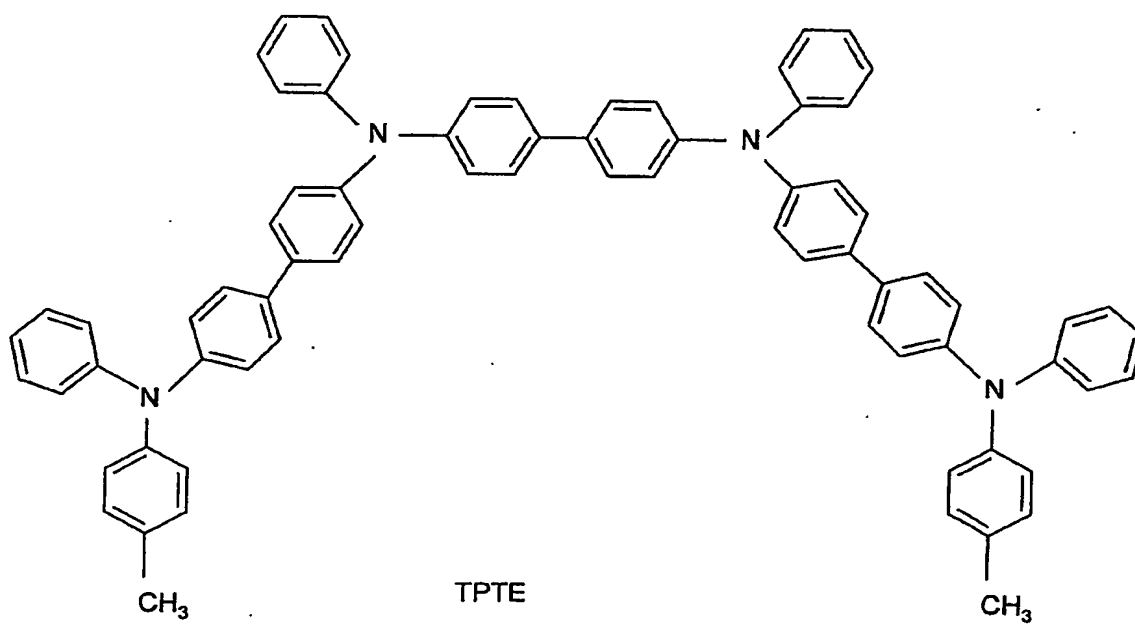


Fig. 15b

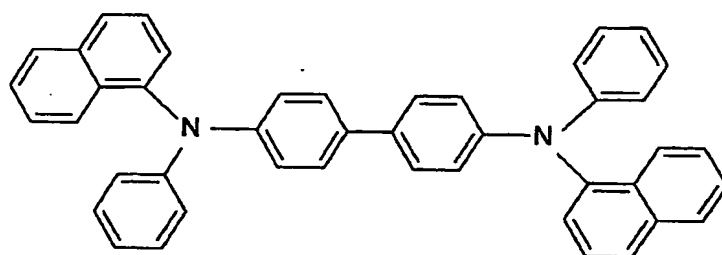


$\alpha$ -NPB

Fig. 16a

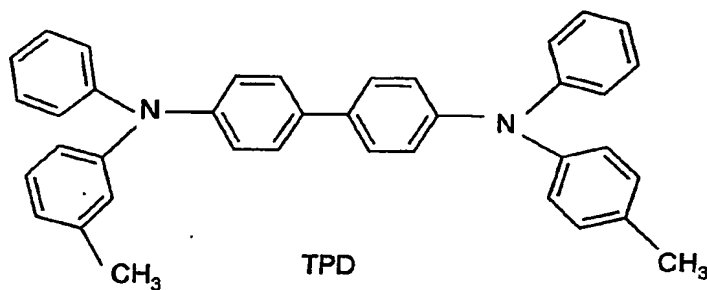

TPD

Fig. 16b

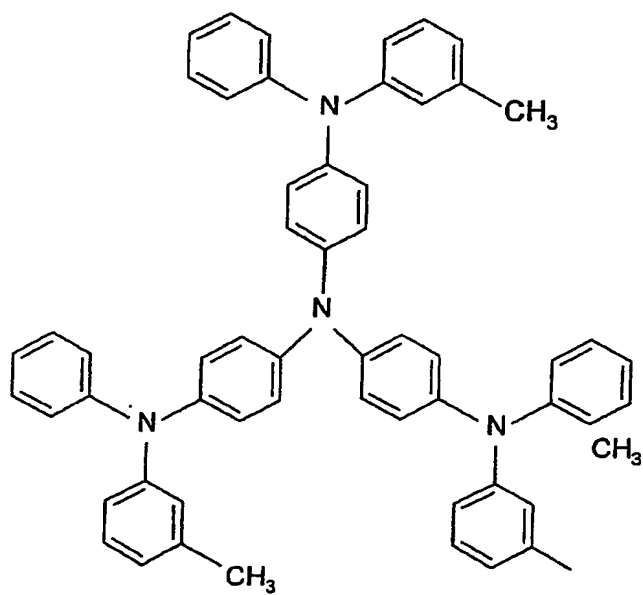

mTADATA

Fig. 16c

17/25

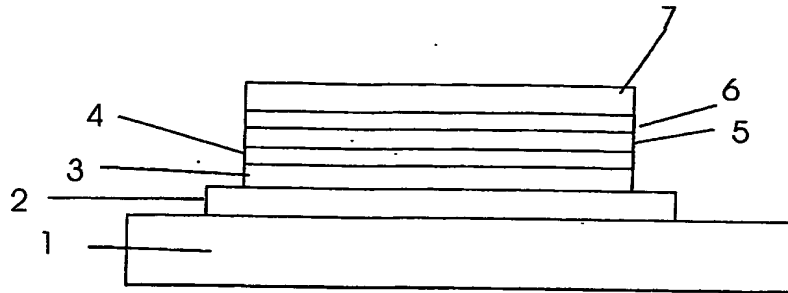


Fig. 17a


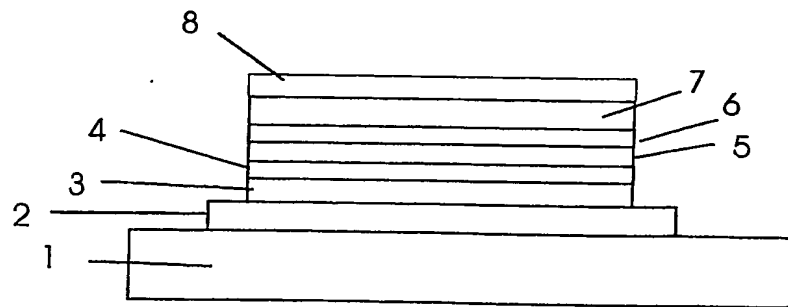


Fig. 17b



## Device Configuration 1:

ITO (100  $\Omega/\square$ )/CuPc (8 nm)/ $\alpha$ -NPB (40 nm)/R1 (10 nm)/ CBP+  
Ir(dpp)<sub>3</sub>(6%)+R1(40%) (20 nm)/R1 (20 nm)/BCP (6 nm)/Alq<sub>3</sub> (20 nm)/  
Al

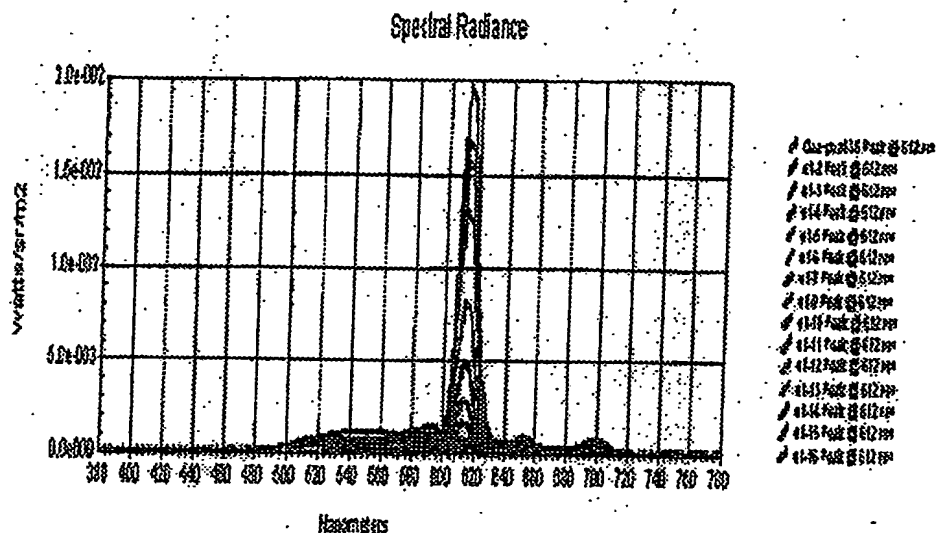

Voltage / V	Colour Co-ordinates	
	x	y
22	0.61	0.33
24	0.62	0.33
26	0.62	0.34
28	0.63	0.35
30	0.63	0.35
33	0.63	0.35
36	0.63	0.35
39	0.63	0.35
42	0.63	0.35
46	0.62	0.36
50	0.62	0.36
54	0.61	0.37
58	0.61	0.37
62	0.60	0.38
66	0.59	0.39


Device ID: F2Y

Fig. 18

19/25

# Device Configuration 2:

ITO (100  $\Omega/\square$ )/CuPc (8 nm)/ $\alpha$ -NPB (40 nm)/CBP+Ir<sub>2</sub>(diacac)<sub>2</sub>(dpp)<sub>2</sub> (6%)+R1 (40%) (20 nm)/R1 (20nm)/BCP (6 nm)/Alq<sub>3</sub> (20 nm)/Al

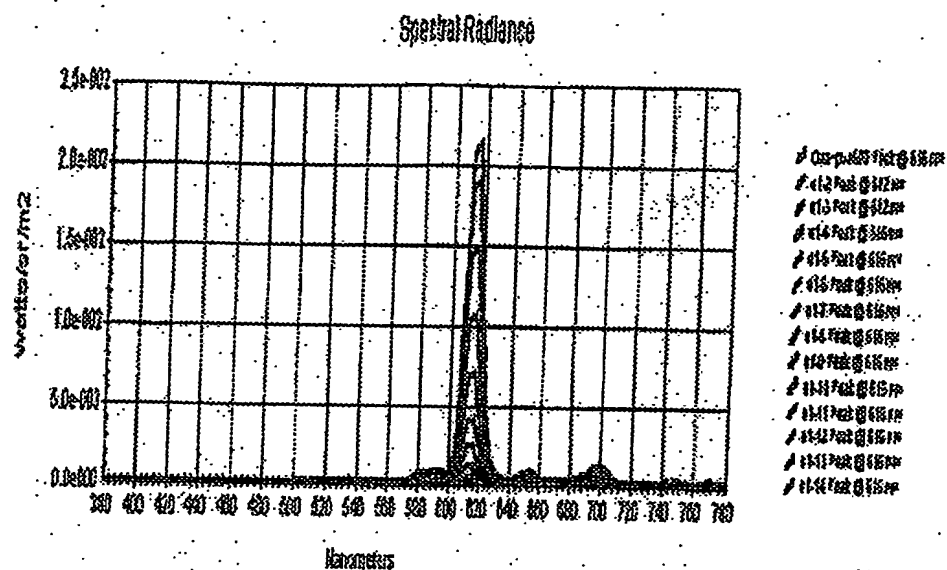


Voltage / V	Colour Co-ordinates	
	X	Y
30	0.62	0.32
33	0.62	0.32
36	0.62	0.33
39	0.66	0.33
42	0.66	0.33
46	0.66	0.33
50	0.66	0.33
54	0.66	0.33
58	0.66	0.33
62	0.66	0.33
67	0.66	0.33
72	0.65	0.33
77	0.65	0.33
82	0.65	0.33

Device ID: F3G

Fig. 19

**Device Configuration 3:**

ITO (100  $\Omega/\square$ )/CuPc (8 nm)/ $\alpha$ -NPB (40 nm)/CBP+Ir(acac)<sub>3</sub> (6%)+R1 (40%) (20 nm)/BCP (6 nm)/Alq<sub>3</sub> (20 nm)/LiF (0.7 nm)/Al

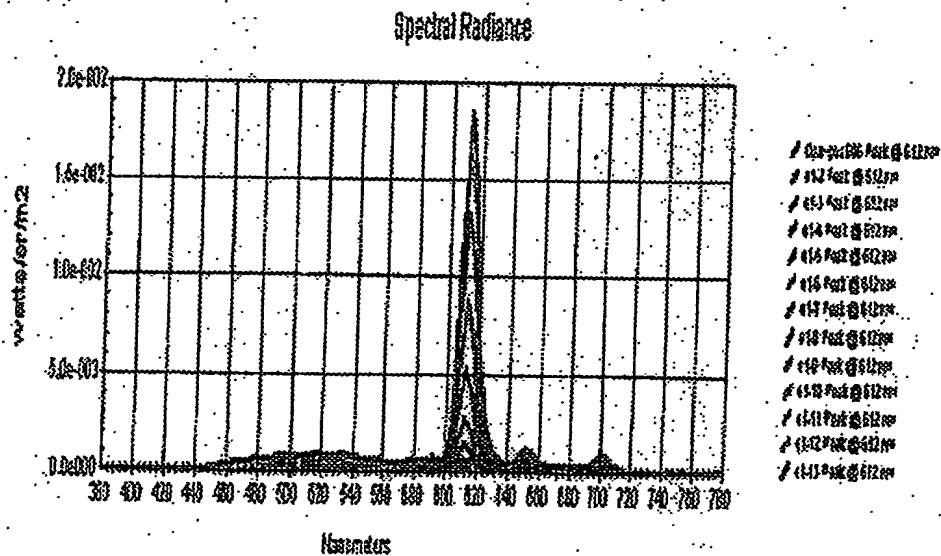

Voltage / V	Colour Co-ordinates	
	x	y
30	0.57	0.34
33	0.60	0.32
36	0.62	0.33
39	0.2	0.33
42	0.63	0.34
45	0.63	0.34
48	0.63	0.34
51	0.63	0.34
55	0.63	0.34
59	0.63	0.34
63	0.62	0.34
67	0.59	0.35
71	0.57	0.36

Device ID: F2M

Fig. 20

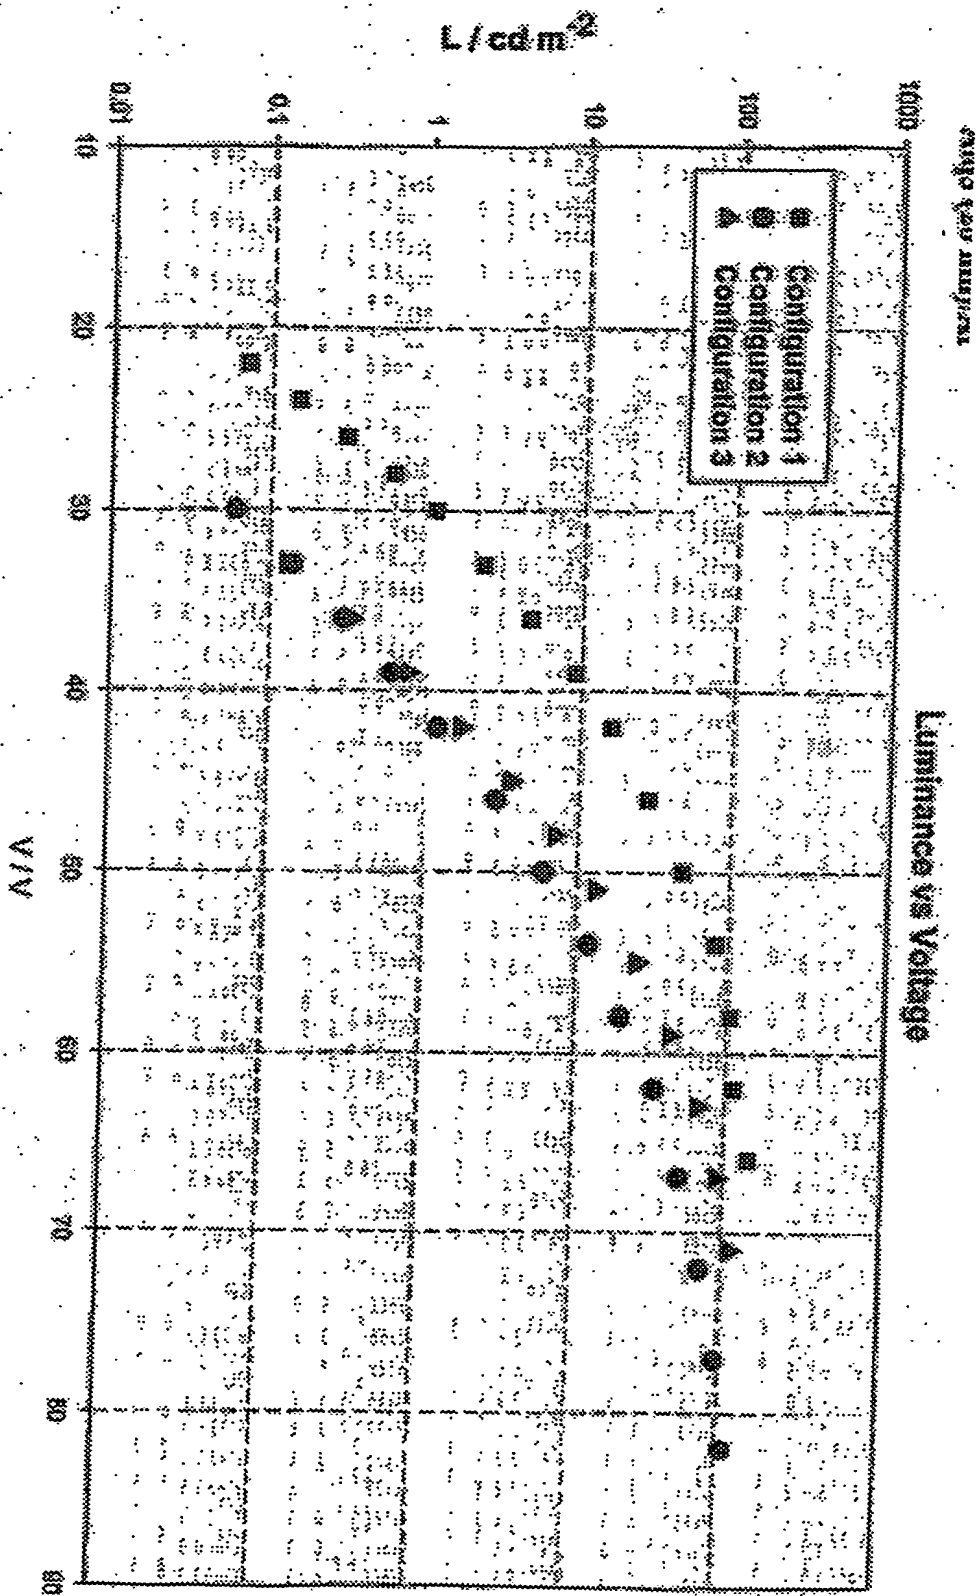


Fig. 21

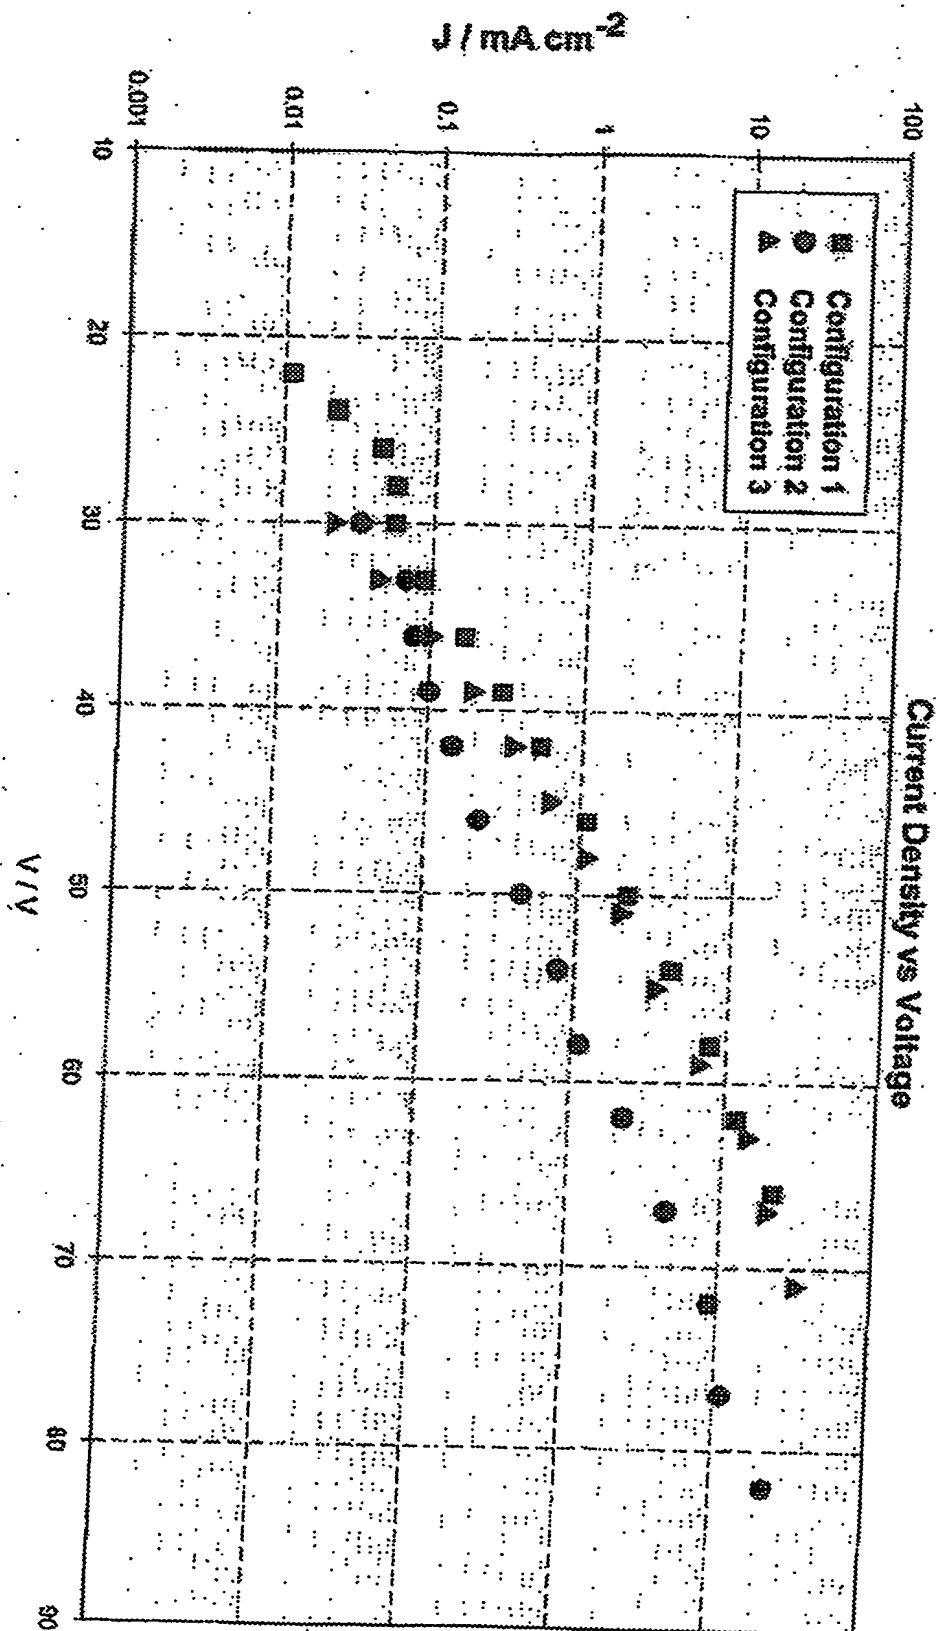


Fig. 22

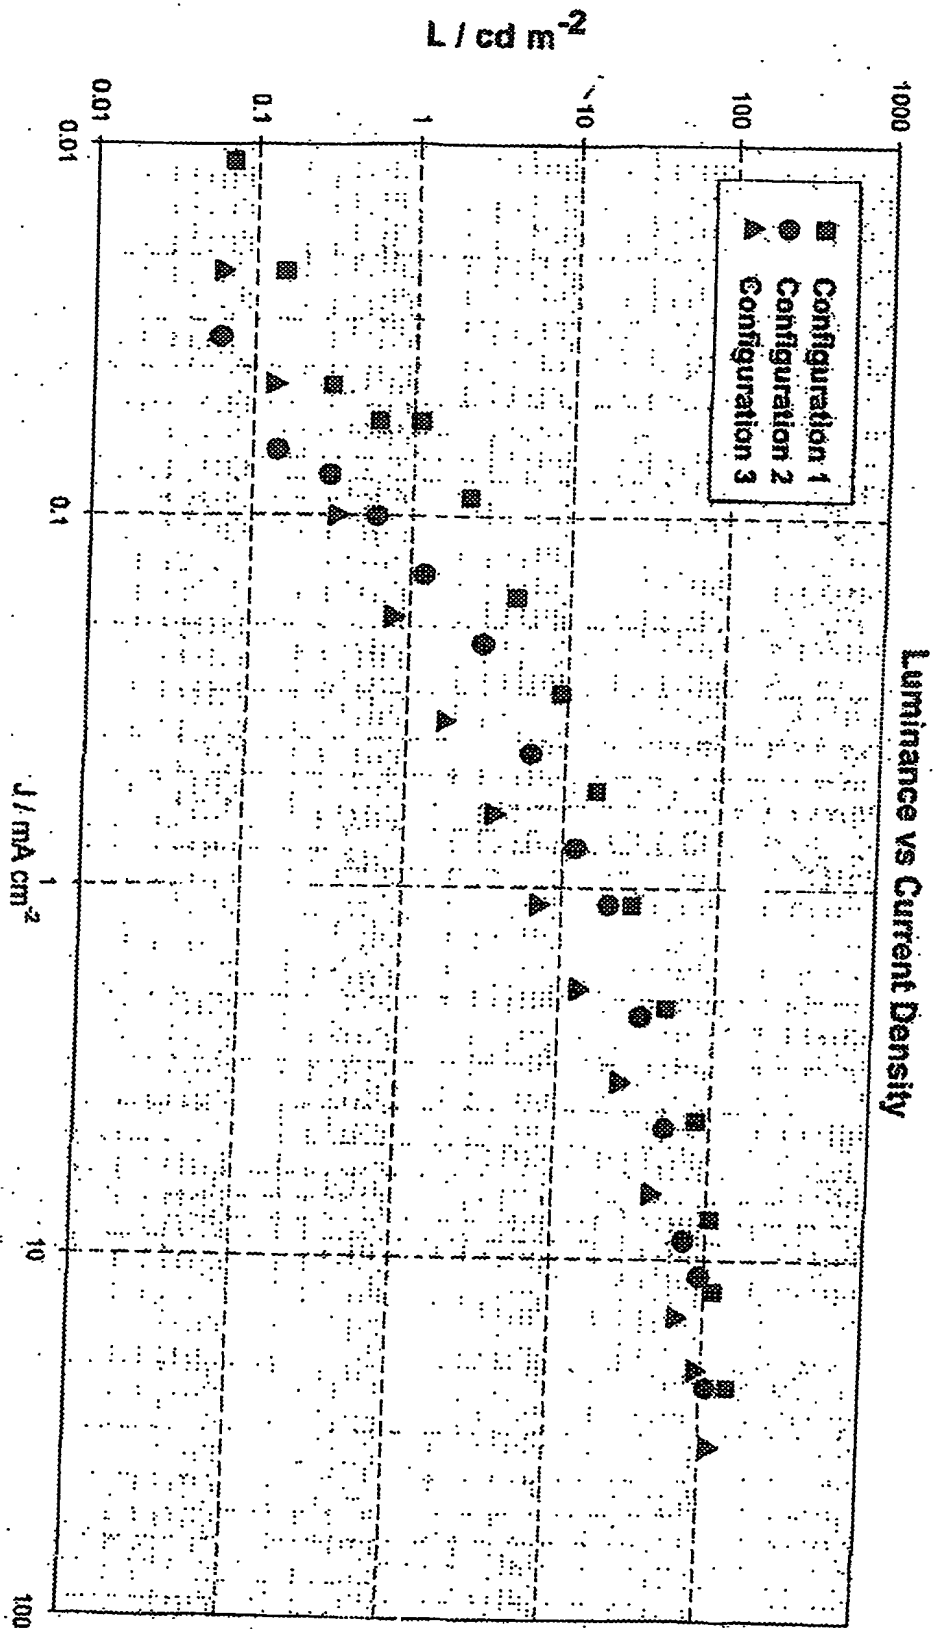


Fig. 23

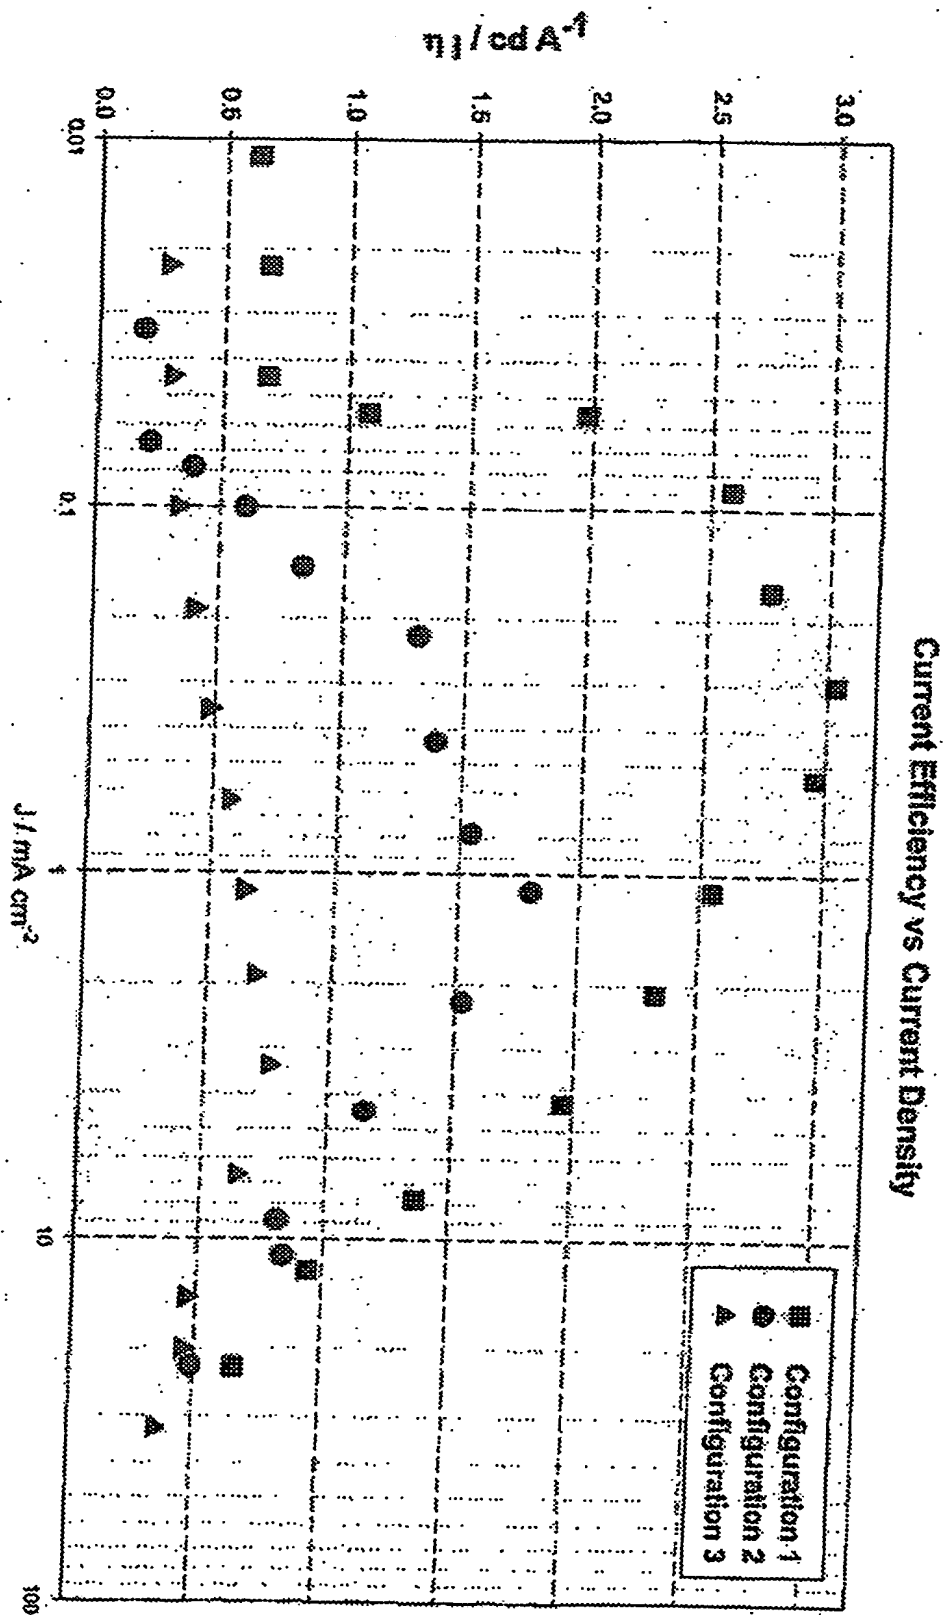


Fig. 24

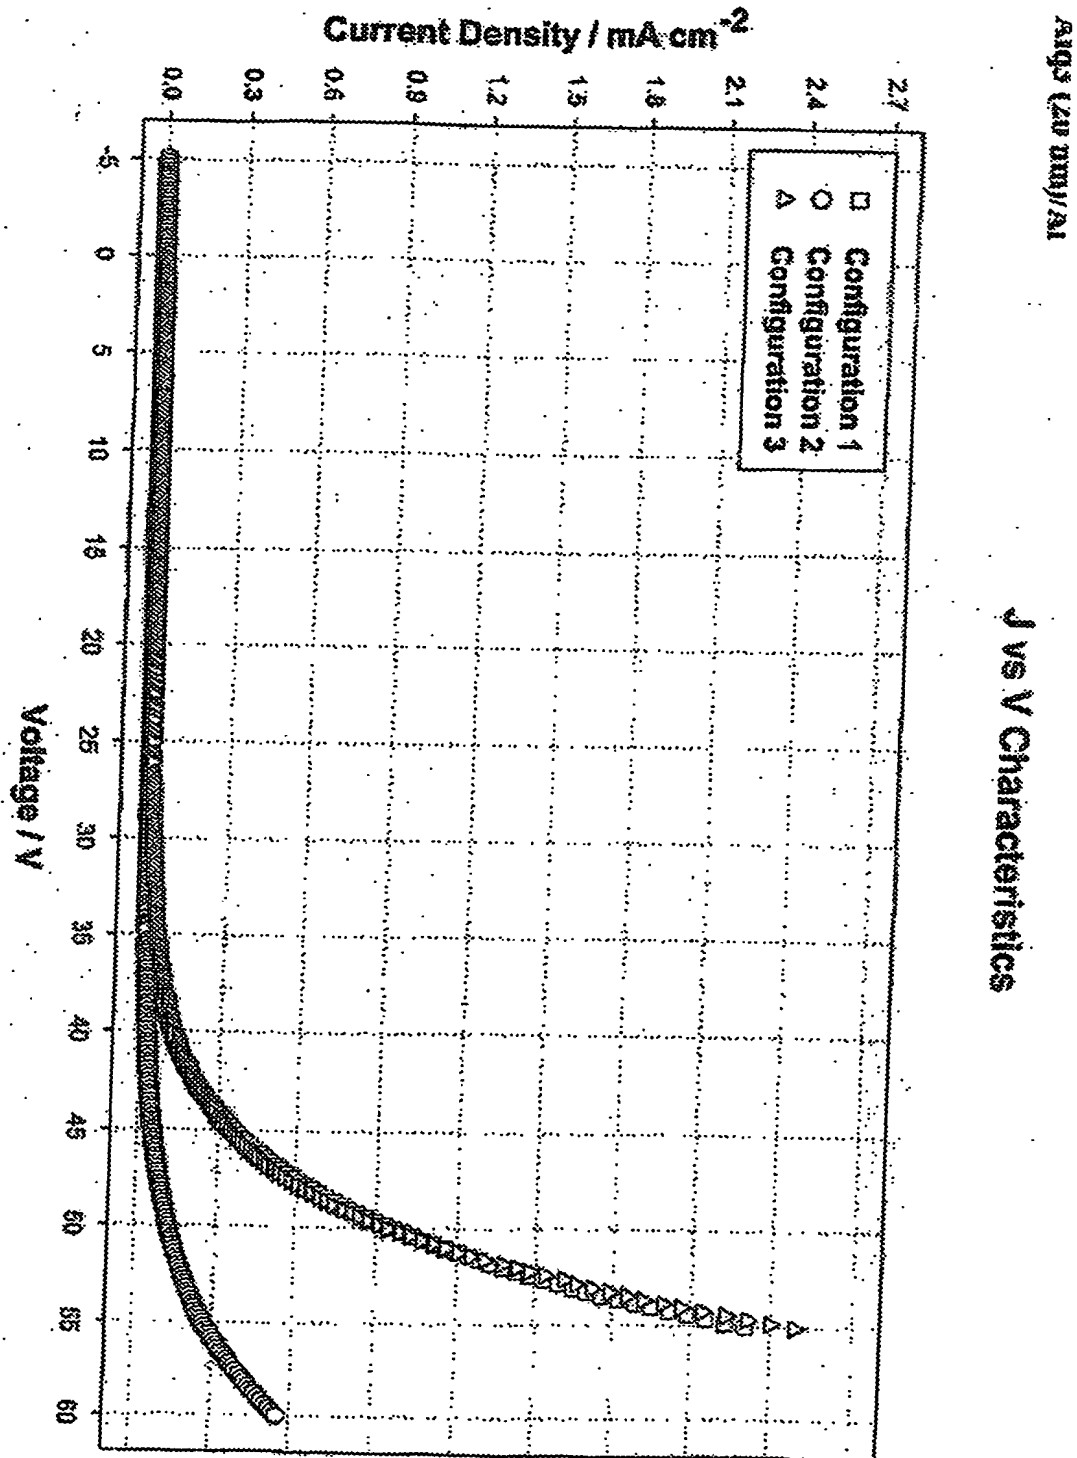


Fig. 25



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**